Appendix/Data Interchange/ Troubleshooting

Menu list 416
Data set by default 422
List of dial keys and character assignments (5-touch Input Method) 427
List of input slots and character assignments (Slot Input Method) 427
List of fixed phrases 428
List of face marks 429
List of symbols 432
List of pictograms 432
KUTEN code input list 435
Combination of operations during Multiaccess 439
Combination of functions during Multitask 441
Services available for FOMA terminal 444
Options and related devices 444

Data Interchange using external devices

About the data link software 444
Playing video data downloaded from the external devices on FOMA terminal 445
Playing video data recorded with FOMA terminal on a PC 446

Troubleshooting

Troubleshooting 446
Example of Error messages ..... Error Message 449
Warranty and After-Sales Service 456
Updating software ..... Software Update 457
Protecting FOMA terminal from hazardous data .... Virus Scan Function 461
Main specification 463
SAR certification information 464

Menu list

- The menu differs depending on the menu display style (Menu Setting).
- One-byte and two-byte characters shown on the display may differ from those below.

: When the settings have been changed, the default settings are not restored by performing Reset.

1 Mail

Menu item	Default	Page
1 Inbox	――――	P246
2 Compose message	――――	P228
3 Chat mail	――――	P261
4 Unsent messages	――――	P246
5 Outbox	――――	P246
6 Check new message		
1 i-mode message	――――	P241
2 SMS	――――	P266
3 Receive option	――――	P241
4 Message retrieval	selected (all)	P257
7 SMS		
1 Compose SMS	――――	P264
2 Received SMS	――――	P267
3 Sent SMS	――――	P267
4 SMS settings	Font type: Japanese SMS report request: Not request Keep in SMS center: 3 days SMSC: DoCoMo Address: 81903101652 Type of Number: international	P266
8 Read templates	――――	P237
9 Mail settings		
1 Mail alert	Ring alert: Melody/ メール・メロディ A (Mail, melody A) Light alert: Glimmer/Aqua Vibrate alert: OFF Ring time (sec): 10	P260
2 Chat mail alert	Alert setting: Customize Ring alert: Melody/ メール・メロディ B (Mail, melody B) Light alert: Glimmer/ Lavender Vibrate alert: OFF Ring time (sec): 10	P264
3 Sort criteria	ON (all)	P255
4 Signature	Auto add: ON Edit signature: not registered	P256
5 Reply setting		
1 Reply format	Quote: Yes Quote characters: >	P258
2 Activate quick reply	ON	P258
3 Quick reply template	OKです。(OK) NGです。(No good) ありがとう！ (Thank you !) ゴメンなさい！ (Sorry !) 後ほど連絡します。 (Get in touch later.)	P258
9 Mail settings		
6 Mail group	――――	P257
7 Display settings		
1 Display priority	Show message	P260
2 Receive option	OFF	P257
3 Incoming msg attach	Image/Melody/ToruCa	P259
4 Attachment auto-play	Auto play	P259
5 Message list	Display 2 rows	P258
6 Only view	OFF	P259

2 i-mode

Menu item	Default	Page
1 iMenu	――――	P200
2 Bookmark	――――	P205
3 Go to location		
1 Enter URL	――――	P204
2 URL history	――――	P205
3 Last visited URL	――――	P202
4 Screen memo	――――	P207
5 i-mode message	――――	P241
6 Message R&F		
1 Message R	――――	P215
2 Message F	――――	P215
3 Message settings		
1 Auto-display	MessageR preferred	P215
2 Message retrieval	selected (all)	P257
3 Attachment auto-play	Auto play	P259
4 Message alert	Ring alert: Melody/ メール・メロディ C (Mail, melody C) Light alert: Glimmer/Lemon Vibrate alert: OFF Ring time (sec): 10	P215
7 i-Channel		
1 i-Channel list	――――	P291
2 Ticker setting	Show ticker: Yes Ticker speed: Normal	P292
8 i-mode settings		
1 i-mode shortcuts	Not recorded	P206
2 Connection timeout	60 seconds	P212
3 Display light	Terminal setting	P213
4 i-mode arv. act: PT	PushTalk preferred	P104

 Note: The miniSD memory card is not included in the bundle and needs to be purchased. ☛P331

Menu item	Default	Page
8 i-mode settings		
5 Certificate		
1 Set certificate*1	all valid	P217
2 Certificate download	———	P217
3 Certificate host	DoCoMo	P218
6 Image & Effect	Image, Animation: Display Use phone information: Yes Sound effect setting: ON	P213
7 i-motion	Auto replay setting: Auto Play ON i-motion type setting: Normal type	P221
8 Host selection	i-mode(UIM)	P212
9 Full Browser		
1 Home	———	P304
2 Bookmark	———	
3 Got to location		
1 Enter URL		
2 URL history	———	
3 Last visited URL	———	
4 Browser settings		
1 Home URL	not registered	P308
2 Cookie set/delete	Valid	P308
3 Script setting	Script Setting: Valid Window Open Guard: Invalid	P309
4 Display mode setting	Mobile mode	P309
5 Image display	Image, Animation: Display	P309
6 Access setting	No	P309
7 Referer setting	Send	P310
8 Screen view setting	With menu icon view	P310

3 i-αppli

Menu item	Default	Page
1 Software list	———	P273
2 i-αppli settings		
1 Sort software	By download time	P286
2 Auto start	ON	P282
3 Software info disp.	OFF	P272
4 Display light	Terminal setting	P275
5 Vibrate effect	ON	P275
6 i-αppli shortcuts	Not recorded	P282
3 Display history	———	P274 P283 P284

4 Phonebook & Logs

Menu item	Default	Page
1 Phonebook	Show all names	P112
2 Phonebook new entry	———	P107
3 Phonebook(UIM) new entry	———	P110
4 PushTalk phonebook	———	P99
5 Received calls	———	P66
6 Redial	———	P56
7 Ans. machine/Voice memo		
1 Answer machine	Deactivate	P75
2 Recorded messages	———	P78
3 Record voice memo	———	P380
4 Voice memos	———	P381
8 Own number	My phone number: subscribed phone number Other than that: not recorded	P48, P379

5 Data Box

Menu item	Default	Page
1 Image	———	P312
2 i-motion	———	P320
3 Melody	———	P330
4 Chara-den	———	P327
5 My Documents	———	P354

6 LifeKit

Menu item	Default	Page
1 Bar code reader	———	P192
2 Data exchange		
1 Send all Ir data	———	P348
2 Receive Ir data	———	P349
3 Exchange settings	End alert: OFF Auto Authentication: OFF Ph.book image sending: ON	P351
4 USB mode settings	Communication mode	P342
3 ToruCa		
1 ToruCa list	———	P297
2 ToruCa settings	ToruCa receive, Light alert: ON Light color: Sky Receive alert volume: Level4	P299
4 IC card		
1 IC card content	———	P295
2 Lock/Unlock	OFF	P300
3 Timed lock	OFF	P301
4 IC card lock setting	Security code	P300
5 miniSD card	———	P338
6 Camera	———	P176
7 Movie camera	———	P181
8 Sound recorder	———	P352
9 Data Center		
1 Access Data Center	———	P125
2 Synchronization log	———	P125
3 Sync setting	OFF	P126

*1 Certificates saved in the UIM are also reset to the default (all valid) by performing Reset.

7 Stationery

Menu item	Default	Page
1 Scheduler	――――	P370
2 Notepad	――――	P384
3 Alarm clock	not set	P368
4 Calculator	――――	P383
5 Dictionaries	――――	P385

8 Settings & NW services

Menu item	Default	Page
1 Alerts & Sounds		
1 Set sound		
1 Call ring alert		
1 Call ring alert	Melody/Vivaldism	P128
2 V.phone ring alert	Melody/電話・メロディ A (Phone, melody A)	P128
3 P-Talk ring alert	Melody/電話・メロディ B (Phone, melody B)	P128
4 Anonymous caller	Disable settings (all)	P166
2 Mail/Msg ring alert		
1 Mail ring alert	Melody/メール・メロディ A (Mail, melody A)	P128
2 Chat M ring alert	Melody/メール・メロディ B (Mail, melody B)	P128
3 Msg R ring alert	Melody/メール・メロディ C (Mail, melody C)	P128
4 Msg F ring alert	Melody/メール・メロディ C (Mail, melody C)	P128
3 Alarm sound		
1 Alarm clock sound	Melody/アラーム・メロディ (Alarm, melody)	P130
2 Schedule reminder	Alarm on time: Melody/アラーム・女性ボイス (Alarm, female voice) Alarm in advance: Melody/パターン4 (Pattern 4)	P130
4 Operation sound		
1 Keypad sound	Keypad sound1	P130
2 Speed selector sound	Selector sound1	P130
3 Shutter sound	Shutter sound1	P131
4 Movie camera sound	Shutter sound1	P131
5 Lens cover sound	Open cover sound: Open cover sound1 Close cover sound: Close cover sound1	P131
6 Slide sound	Open slide: Melody/スライド・オープン音1(Slide opening sound1) Close slide: Melody/スライド・クローズ音1(Slide closing sound1)	P131
5 Charge alert	ON	P134
6 Call session		
1 Status message	Standard	P72
2 On-hold tone	保留音・ボイス(On-hold tone, voice)	P72
3 Quality alarm	High alarm	P134
4 Reconnect alarm	High alarm	P61
5 Low Battery alert	ON	P45

Menu item	Default	Page
1 Alerts & Sounds		
2 Adjust volume		
1 Call alert volume	Level 4	P69
2 Mail/Msg alert vol.	Level 4	P69
3 Listen volume	Level 4	P69
4 Alarm volume		
1 Alarm clock sound	Level 4	P69
2 Schedule reminder	Level 4	P69
5 i-αppli effect sound	Level 4	P69
6 ToruCa receive alert	Level 4	P69
3 Vibrate alert/effect		
1 Call vibrate alert		
1 Call vibrate alert	OFF	P133
2 V.phone vibe alert	OFF	P133
3 P-Talk vibrate alert	OFF	P133
2 Mail/Msg vibe alert		
1 Mail vibrate alert	OFF	P133
2 Chat M vibrate alert	OFF	P133
3 Msg R vibrate alert	OFF	P133
4 Msg F vibrate alert	OFF	P133
3 Alarm vibrate		
1 Alarm clock	OFF	P133
2 Schedule reminder	OFF	P133
4 i-αppli effect	ON	P133
4 Silent mode	General	P135
5 Set mute ring time	OFF	P167
2 Display		
1 Stand-by display		
1 Image/i-αppli	use Style Theme setting	P136
2 Clock format	use Style Theme setting	P151
3 Battery icon	use Style Theme setting	P147
4 Info/calendar layout	Pattern 4 (Set Area1, Set Area2: not registered Set Area3: Key guidance)	P139
5 i-Channel ticker	Show ticker: Yes Ticker speed: Normal	P292
2 Menu preference		
1 Menu setting*2	Normal: use Style Theme setting Custom: Tile display Type of animation: use Style Theme setting Icon display effect: OFF Default MENU: Normal Active shortcut: Custom	P146
2 Customize shortcut	Standard	P376

*2 If Reset is performed, ***Normal***, ***Type of animation*** and ***Type of tile icons***; ***Customized 1***, ***Customized 2*** return to the default settings.

Menu item	Default	Page
2 Display		
3 Color & Action image		
1 Color scheme	use Style Theme setting	P146
2 Mail/Call image		
1 Outgoing call	Display image: Default	P142
2 Incoming call	Standard image	P142
3 Videophone dialing	Display image: Default	P142
4 Videophone receiving	Standard image	P142
5 Contact image	ON	P143
6 Anonymous caller	Disable settings (all)	P166
7 Outgoing message	Display image: Default	P144
8 Incoming message	Display image: Default	P144
9 Message retrieval	Display image: Default	P144
3 Receive display	Caller's phone number: Display Caller's name: Standard Receive mail/message: Display	P144
4 Videophone image	Substitute image: Default Chara-den Answer machine image, Response hold image, On-hold image, Movie memo image: Default	P91
4 Display light		
1 Display light time	Normal use: 10 sec AC adapter connected, i-mode session: Terminal setting Camera session, Movie camera session, i-motion playing: Always on i-αppli active: Terminal setting	P144
2 Light area	Display + Key	P145
3 Brightness	Normal	P145
5 Light alert		
1 Light alert	Incoming Videophone: Flash/Lime Incoming call: Flash/Sky Incoming Mail: Glimmer/Aqua Incoming Message R, Incoming Message F: Glimmer/Lemon Incoming Chat Mail: Glimmer/Lavender Incoming PushTalk: Flash/Peach ToruCa receive: ON/Sky	P148
2 Call session light	OFF	P148
3 IC card light	ON/Sky	P148

Menu item	Default	Page
2 Display		
5 Light alert		
4 Speed selector/Other	Speed selector: ON/Green-Blue-Red:Mix Alarm clock, Schedule: Flash/Coral Play melody: Sync melody Open slide, Close slide: Glimmer/Turquoise	P148
6 Indicator light	OFF	P149
7 Font & Language		
1 Font Size	Standard (all)	P150
2 Select language	Japanese	P46
8 Style theme	use the color of FOMA terminal	P152
3 Security & Locks		
1 Locks		
1 All lock	not set	P158
2 PIM lock	OFF	P160
3 IC card lock		
1 Lock/Unlock	OFF	P300
2 Timed lock	OFF	P301
3 IC card lock setting	Security code	P300
2 Secret mode	not set	P165
3 Keypad dial lock	OFF	P161
4 UIM	PIN code, PIN2 code: 0000 PIN code ON/OFF: OFF	P156
5 Change security code	0000	P155
6 Privacy mode	Phonebook & Logs, Mail, My picture, i-motion, Schedule, i-αppli: Show all Auto start: OFF	P162
7 Scanning function		
1 Update	—	P462
2 Set auto-update	—	P462
3 Set scan	ON	P461
4 Version	—	P463
8 Key lock setting	OFF when slide open	P164
4 Info. & Reset		
1 Call duration	—	P381
2 Confirm	—	P388
3 Battery level	—	P45
4 Call cost		
1 Last call cost	—	P382
2 Call cost limit	Alert: OFF	P383
3 Hide call cost icon	—	P383
4 Reset call cost	OFF	P382
5 Reset	—	P389
6 Delete all data	—	P389
5 Clock		
1 Date & time*3	Auto time adjust: ON Offset: +, 00h00m	P47
2 Auto power ON	OFF	P367
3 Auto power OFF	OFF	P367
4 Clock display format	use Style Theme setting	P151
5 Alarm auto power ON	OFF	P369

*3 Date and time remain unchanged after performing Reset.

Menu item	Default	Page
6 Call & Answer		
1 Outgoing call	Display image: Default	P142
2 Call alert	Ring alert: Melody/ Vivaldism Show image: Standard image Vibrate alert: OFF Light alert: Flash/Sky	P70
3 Anonymous caller	Disable settings (all)	P166
4 Any key answer	ON	P65
5 Headset		
1 Alert preference	Headset + speaker	P388
2 Auto answer	OFF	P387
3 Headset key control	OFF	P387
6 Reject/Accept call		
1 Specified caller	Cancel settings	P165
2 Unregistered caller	OFF	P168
7 Make/Receive call		
1 Priority comm mode	No Set Up	P70
2 Prefix dialing	009130010	P60
3 Int'l Dial Setting		
1 Auto Assist Setting	Auto assist ON	P59
2 IDD Prefix Setting	Name: World Call Prefix: 009130010	P59
4 Sub address	ON	P60
5 Open answer	OFF	P65
8 Call session		
1 Noise reduction	ON	P61
2 Close settings	Continue	P65
9 Self mode	OFF	P160
7 Videophone & PushTalk		
1 Videophone		
1 V.phone dialing img.	Display image: Default	P142
2 Videophone alert	Ring alert: Melody/電話・メロディ A(Phone, melody A) Show image: Standard image Vibrate alert: OFF Light alert: Flash/Lime	P70
3 Operation	Auto redial as voice: OFF Display setting: Both sides Sub screen: My side Screen size: Large Visual preference: Normal Display light: Always on (normal) Speakerphone: ON	P90
4 DataSession arv. act	V.phone priority	P93
5 Image setting	Substitute image: Default Chara-den Answer machine image, Response hold image, On-hold image, Movie memo image: Default	P91
6 External device	Terminal	P94

Menu item	Default	Page
7 Videophone & PushTalk		
1 Videophone		
7 Notify switchable mode		
1 Indication ON	active	P93
2 Indication OFF	――――	P93
3 Service status	――――	P93
2 PushTalk (PT)		
1 PushTalk alert	Ring alert: Melody/電話・メロディ B(Phone, melody B) Vibrate alert: OFF Light alert: Flash/Peach	P70
2 PushTalk ring time	30 sec	P103
3 Notify PTcaller ID	Hide caller ID	P102
4 PushTalk auto answer	OFF	P103
5 PushTalk arv. act	Call Rejection	P103
6 Setting when folded	Continue	P104
7 i-mode arv. act:PT	PushTalk preferred	P104
8 Others		
1 Save word/Phrase		
1 Save word	――――	P410
2 Save phrase	――――	P409
2 DL dictionary	――――	P412
3 Reset prediction	――――	P407
4 Text input method	Input method: 5-touch Input prediction: ON Auto cursor: Normal	P413
5 NW search method	Auto select NW	P388
6 Software update	――――	P458
7 Quick start-up	ON	P388
8 Edit by slide	ON (all)	P366
9 Set speed selector	Speed selector: ON Direction: Clockwise Use at stand-by disp: Menu	P28
9 NW Services		
1 Voice Mail		
1 Voice Mail service		
1 Activate	――――	P392
2 Set ring time	――――	
3 Deactivate	――――	
4 Check setting	――――	
5 Play messages	――――	
6 Voice Mail setting	――――	
7 Check messages	――――	
2 Tone/Vibration message notification	Voice Mail alert: ON Notification melody: メール・メロディ B (Mail, melody B)	
3 Notify missed call		
1 Activate	――――	
2 Deactivate	――――	
3 Check setting	――――	

Menu item	Default	Page
9 NW Services		
1 Voice Mail		
4 Hide Voice Mail icon	—	P392
2 Call waiting		
1 Activate	—	P393
2 Deactive	—	
3 Check setting	—	
3 Call forwarding		
1 Activate	—	P394
2 Deactivate	—	
3 Register The Forwarding Number	—	
4 Setting if forwarding number busy	—	
5 Check setting	—	
4 Chaku-moji		
1 Create message	—	P54
2 Message display setting	Only with Caller ID	P55
5 Caller ID notification		
1 Activate/ Deactivate	—	P48
2 Check setting	—	P48
6 Caller ID request		
1 Activate	—	P395
2 Deactivate	—	
3 Check setting	—	
7 Set arrival act		
1 Activate	—	P396
2 Deactivate	—	
3 Check setting	—	
8 Arrival call act	Answer	
9 Others		
1 Register USSD	—	P398
2 Record reply message	—	
3 Remote control		
1 Activate	—	P397
2 Deactivate	—	
3 Check setting	—	
4 Nuisance call barring		
1 Register the caller	—	P395
2 Register selected No	—	
3 Delete all entries	—	
4 Delete last entry	—	
5 Check the number of entries	—	

Menu item	Default	Page
9 NW Services		
9 Others		
5 English guidance		
1 Guidance setting	—	P396
2 Check setting	—	
6 Dual network		
1 Dual Network Switching	—	P395
2 Check setting	—	
7 Service Dialing Number		
1 ドコモ故障問合せ	—	P396
2 ドコモ総合案内・受付	—	
8 Multi number		
1 Set Multi Number	—	P397
2 Check setting	—	
3 Number Setting	Basic Number: 基本契約番号(Basic Number)/my phone number Additional No1: 付加番号1 (Additional Number 1)/ Not recorded Additional No2: 付加番号2 (Additional Number 2)/ Not recorded Multi number call: Disable	
4 Incoming calls melody setting	OFF	

9 Music Player

Menu item	Default	Page
Music Player	—	P361

0 Own number

Menu item	Default	Page
Own number	My phone number: subscribed phone number Other than that: not recorded	P48, P379

Data set by default

Image/i-motion for the standby display

■ Image

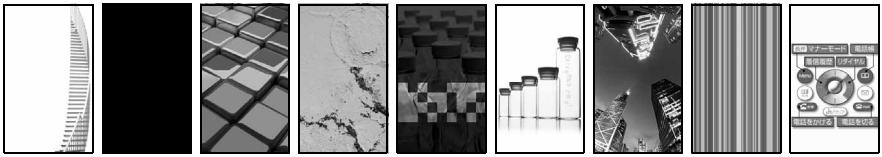

White steps | Black stage | Blue block | Yellow wall | Crystal*1 | Bottle scan*1 | Night scene | Bars | Key guidance*2

■ i-motion

Journey | Ocean*3

*1 It is Flash movie. The display changes with time.

*2 If ***Style*** is set to ***Digital 1*** or ***Digital 3*** and ***Clock layout*** is set to ***Top*** in Clock Display Format, the clock does not overlap with the key guidance.

*3 It can also be set to Movie ringtone.

Normal menu

■ Tile display

Type1 | Type2 | Type3 | Type4 | Type5

■ Animation

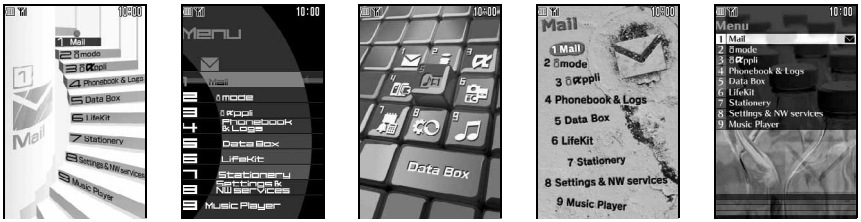

Type1 | Type2 | Type3 | Type4 | Type5

Image for Deco-mail picture

The following images are stored in the ***Deco-Mail picture*** folder of ***Image*** (My Picture) in ***Data Box***.

- You can download the images from the i-mode site “My D-style”, if you have deleted them. ☛P426
- The design of some images may be unclear when the background color is set to white.
- Some of the following images may be different from those on the screen, because the background color is changed to make the design clear. Also the size of the image is different from that of the image to be inserted actually.

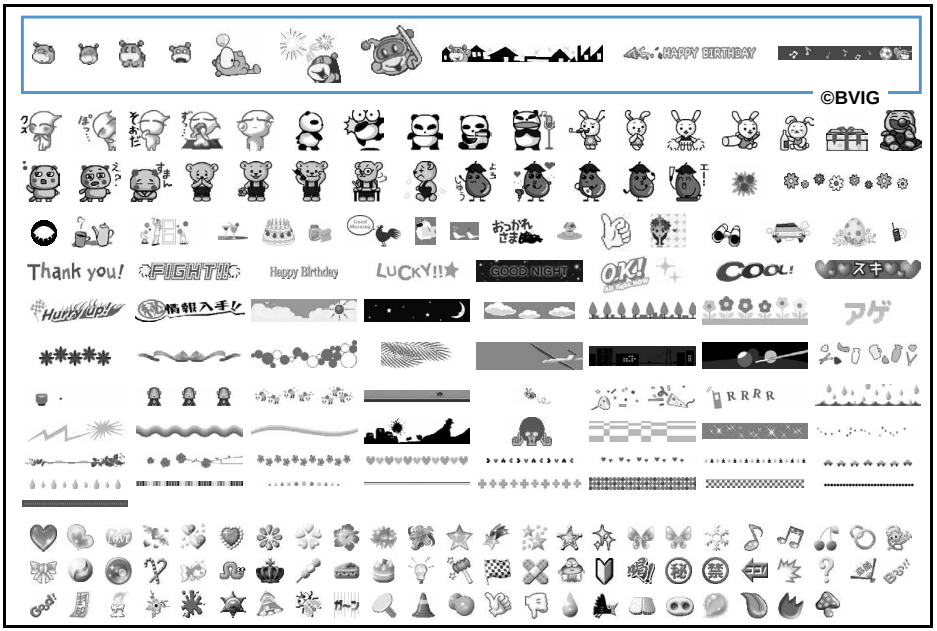

Mail template

ブンブン カフェ (bunbun cafe)



©BVIG

ブンブン お昼ね (bunbun napping)

©BVIG

ブンブン フラワー (bunbun flower)



©BVIG

ありがとう (Thank you)

助かっちゃった (Thanks for help)

おめでとう！ (Congratulations!)

誕生日おめでとう (Happy birthday)

久しぶり (Long time no see)

頑張って (Cheer up)

調子はどう？ (How are you doing?)

おつかれさま (Good job today)



ラッキー！ (Lucky!)

幸せ気分 (I'm happy)

好きです･･･ (I love you)

お願い (Please!)

急いでます！ (I'm in a hurry!)

電話します (I'll call you)

お茶しよ～ (Let's have tea)

OK!

遊びにいこう (Let's go!)

旅にでようよ (Let's take a trip)

いってらっしゃい (Bye!)

おはよ！ (Good morning!)

おやすみ (Good night)

反省してます (Sorry)

さみしい (I miss you)

ちょっと怒ったよ (I'm angry)

忙しい忙しい (So busy)

飲みたい気分 (I want to drink)

マル秘情報 (Secret information)



Frame

- If preinstalled images are deleted, they can be downloaded from the i-mode site "My D-style". ☛P426

■ **Size for standby (240 x 400)**

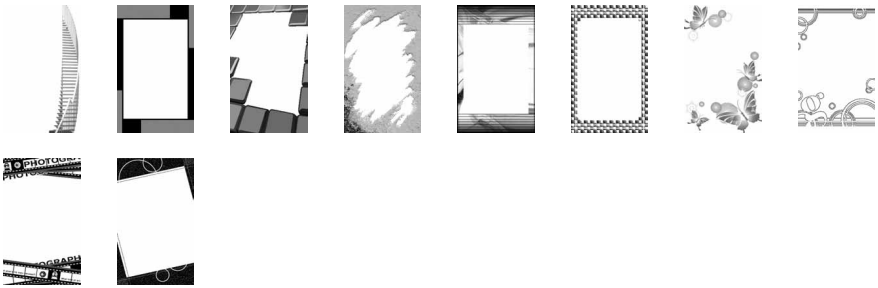

■ **QVGA size (240 x 320)**

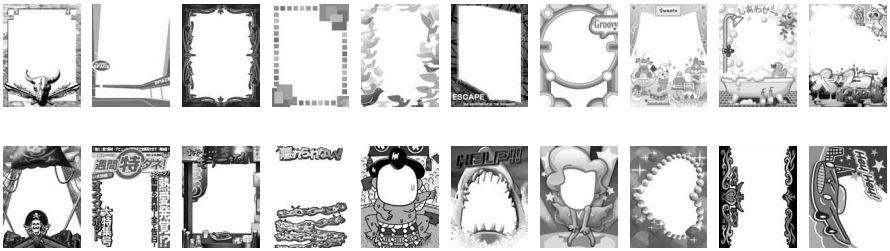

■ **QCIF size (176 x 144)**

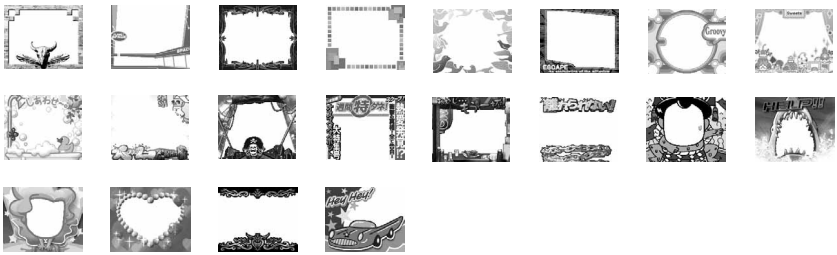

Stamp

Chara-den

• You can download Chara-den from the i-mode site “My D-style”, if you have deleted them.

■ **ブンブン(bunbun)(Dimo)**

©BVIG

Action

1	嬉しい (Glad)	4	ラブラブ (Love)	7	着ぐるみ (Dressed in a costume)
2	ごめんなさい (Sorry)	5	病気 (Sick)	8	拾ってください (Please pick up.)
3	びっくり (Surprised)	6	酔っぱらい (Drunken)	9	成金 (An upstart)

■ 女の子(Girl)

Action

1	喜ぶ (Joy)	5	泣く (Weep)	9	さよなら (Goodbye)	#4	あきれる (Amazed)
2	ガッツポーズ (Victory pose)	6	ダメ (Refuse)	#1	悩む (Worried)		
3	愛情 (Affection)	7	挨拶 (Greeting)	#2	称える (Praise)		
4	怒る (Angry)	8	うなずく (Nod)	#3	お願い (Do me a favor)		

Action of parts

11 頭 右を向く（ループ） (Turn the head right (loop))	16 頭 上下に振る (Shake the head up and down)	24 胴体 前に傾く（ループ） (Tilt the body forward (loop))
12 頭 左を向く（ループ） (Turn the head left (loop))	17 頭 回転する (Turn around the head)	31 右手 挙げる（ループ） (Right hand up (loop))
13 頭 上を向く（ループ） (Turn the head up (loop))	21 胴体 右を向く（ループ） (Turn the body right (loop))	41 左手 挙げる（ループ） (Left hand up (loop))
14 頭 下を向く（ループ） (Turn the head down (loop))	22 胴体 左を向く（ループ） (Turn the body left (loop))	51 足 しゃがむ（ループ） (Squat on heels (loop))
15 頭 左右に振る (Shake the head right and left)	23 胴体 後ろを向く（ループ） (Turn around the body (loop))	52 足 ジャンプ (Jump)

How to access i-mode site “My D-style”

To access “My D-style”, select ***iMenu***→ 3 *メニューリスト* (Menu list) →*ケータイ電話メーカー* (Mobile phone manufacturer) (as of May 2006).

● Scanning QR code shown right with Bar Code Reader allows to connect to “My D-style”.

QR code for website access

List of dial keys and character assignments (5-touch Input Method)

Key	Hiragana/kanji mode (two-byte)*1	Katakana mode (one-byte/two-byte)*1	Alphabet mode (one-byte/two-byte)*1	Numeric mode (one-byte/two-byte)*3
1	あ い う え お 1	ア イ ウ エ オ 1	. ／ @ ¯*2 ― : _ [¥] ^ ` { | } 1	1
2	か き く け こ 2	カ キ ク ケ コ 2	a b c 2	2
3	さ し す せ そ 3	サ シ ス セ ソ 3	d e f 3	3
4	た ち つ て と 4	タ チ ツ テ ト 4	g h i 4	4
5	な に ぬ ね の 5	ナ ニ ヌ ネ ノ 5	j k l 5	5
6	は ひ ふ へ ほ 6	ハ ヒ フ ヘ ホ 6	m n o 6	6
7	ま み む め も 7	マ ミ ム メ モ 7	p q r s 7	7
8	や ゆ よ 8	ヤ ユ ヨ 8	t u v 8	8
9	ら り る れ ろ 9	ラ リ ル レ ロ 9	w x y z 9	9
0	わ を ん ー 、。 ・？ ！ 「」□ 0	ワ ヲ ン ー 、。 ・？ ！ 「」□ 0	！ ” # $ % & ’ ( ) ＊ + , ; ＜ ＝ ＞ ? □ 0	0 +*4
＊	゛ ゜	゛ ゜	The following character strings can be entered only in one-byte alphabet mode: @docomo.ne.jp .com .or.jp .go.jp .ne.jp .co.jp .ac.jp http://www. www. .html .htm	＊ P*4
#*5	Line feed	Line feed	Line feed	# T*4

□: Indicates blank space. : Press [#] after entering a character to switch between upper and lower cases.

*1 Numeric characters other than those entered in the two-byte numeric mode are entered as one-byte characters.

*2 This character is entered as “~” in the one-byte alphabet mode.

*3 In numeric mode, “＊”, “#”, “P”, “T” and “ + ” can only be entered in the entry field that supports them.

*4 Hold down the relevant key for over a second to enter the character.

*5 Line feed may not be possible depending on the entry field.

List of input slots and character assignments (Slot Input Method)

Input slot		Hiragana/kanji mode (two-byte)
Upper slot	あ	あいうえおぁぃぅぇぉ 1
	か	かきくけこ 2
	さ	さしすせそ 3
	た	たちつてとっ 4
	な	なにぬねの 5
	゛゜	゛゜
Lower slot	は	はひふへほ 6
	ま	まみむめも 7
	や	やゆよ ゃゅょ 8
	ら	らりるれろ 9
	わ	わをんー 、。？！「」 □ 0
	↵	Line feed

Input slot		Katakana mode (one-byte)
Upper slot	ア	アイウエオァィゥェォ1
	カ	カキクケコ2
	サ	サシスセソ3
	タ	タチツテトッ4
	ナ	ナニヌネノ5
	゛	゛゜
Lower slot	ハ	ハヒフヘホ6
	マ	マミムメモ7
	ヤ	ヤユヨャュョ8
	ラ	ラリルレロ9
	ワ	ワヲン ー 、。？！「」 □ 0
	↵	Line feed

Input slot		Alphanumeric mode (one-byte)
Upper slot	.	. / @ ~ ― : _ [¥] ^ ` { | } 1
	A	A B C a b c 2
	D	D E F d e f 3
	G	G H I g h i 4
	J	J K L j k l 5
	定	@docomo.ne.jp .com .or.jp .go.jp .ne.jp .co.jp .ac.jp http://www. www. .html .htm
Lower slot	M	M N O m n o 6
	P	P Q R S p q r s 7
	T	T U V t u v 8
	W	W X Y Z w x y z 9
	!	! " # $ % & ' ( ) * + , ; < = > ? □ 0
	↵	Line feed

□: Indicates two-byte space in hiragana/kanji mode and one-byte space in katakana, alphanumeric mode.

- “゛ ” and “゜ ” are switched with every press of [↓] in hiragana/kanji mode.
- Numeric characters are displayed as one-byte characters.

List of fixed phrases

■ Common (20 items)

おはよう	おやすみ
おはよー！今日も一日がんばりましょう。	昨日は、とっても楽しかったです。どうもありがとう。
連絡下さい。	今から電話してもいいですか？
ごめんなさい、遅れます。	今日は○○の日です。早く帰って来てね。
○○まで迎えに来て！お願いします。	○○について知っている人は○○までに○○に教えて下さい。
もう少し待ってて！	
いってらっしゃい。	留守電にメッセージをお願いします。
○○で待ってます。	ただいま電話にでることができません。メールでご用件をお知らせ下さい。
集合時間は○○、集合場所は○○です。	
今日は外で食べて帰ります。ご飯はいりません。	メールありがとう。
○○の写真送ります。	最近の○○の写真です。

■ Pleasure (20 items)

今なにしてるの？電話かメールを下さい。	どこか、遊びに行こーよ！
電話ちょうだい！電話番号は○○です。	おくれちゃう、ゴメン！
どこにいるの？	集合！
時間だよーん！！	トラブル発生！！
会いたい！	大好き！
みんなで飲みませんか？○○に○○。	今日○○に、○○へ行きませんか？
○○の待ち合わせ時間と場所、決めようよ。	○○に行かない？
○○のメンバー募集！詳しくは○○まで連絡下さい。	
今度みんなで○○へ行きましょう。○○までで、都合の良い日を教えて下さい。	
今度みんなで○○へ行きましょう。いいところがありましたら、お知らせ下さい。	
○○しませんか？日時：○○、場所：○○。出欠をご連絡下さい。	
メッセージ下さい！！	○○の時の写真だよ。

■ Business (20 items)

本日の○○会議は、○○となりました。	本日の○○訪問は、○○となりました。
○○へ直行します。	○○へ直帰します。
電車遅延のため、○○遅れます。	至急TEL下さい。
予定変更！ TEL下さい。	待ち合わせ変更！場所：○○、時間：○○
○○頃まで、携帯電話の電源を切ります。	振込口座：○○銀行○○支店、口座番号○○、名義人名○○です。
○○の件、よろしくお願い致します。	
今日、一杯どうですか？連絡下さい。	FAX確認願います。
次の指示を待て。	変更します。
延期します。	中止します。
○○での写真送ります。	今わかりません。
あとで連絡します。	

■ Answer (20 items)

Thank you!	Good!	OKです。	NGです。
いいよ。	行きます。	了解。	ダメ！
ごめんネ･･･	スミマセン、無理です。	本当？	おまかせっ！！
関係ないね！	うらやましー。	お疲れさま。	反対。
賛成。	待ってました！	それは残念。	写真届きました。

■ **Others (20 items)**

またねー！	今どこ？	お誕生日おめでとう。	おめでとう。
まじでー！？	まかせなさい！！	キャンセル。	いってきます。
頑張って！	ありがとう！	www.	.ne.jp
.co.jp	.or.jp	.ac.jp	.net
.com	.org	.html	http://

■ **Pictogram words (20 items)**

Pictogram words	Meaning	Pictogram words	Meaning	Pictogram words	Meaning
	ハロー！ /またね (Hello! / See you.)		ごきげん(High spirits)		ピース(Peace)
	るんるん (Cheerful)		落ち込む (Depressed)		どうしよう (At a loss)
	ぷんぷん(Huff)		怒ってるぞ(Fury)		メロメロ (Crazy about)
	パニック(Panic)		寝ます(Sleep)		チュッ！ (Kissing)
	ラブラブ(Love)		ダッシュ (Dash)		えっ何？ (What?)
	写真を撮る (Take a picture)		がんばれ！ (Good luck!)		独りぼっち(Alone)
	カラオケ(Karaoke)		サッカー (Soccer)		

- Pictogram words are not displayed by entering the meaning.

■ **My phrase (up to 50 items)**

- The registered fixed phrases are displayed.

List of face marks

Entering one of the following readings in hiragana/kanji mode allows to convert it. Entering “かお” or “かおもじ” also allows converting for face marks shown as [ ] .

■ **挨拶・返事(Greetings/Answer)**

Face mark	Readings
(^-^)/~~	ばい　あいさつ
(^ ^)ﾉｼ	ばいばい　あいさつ
(^_^)/~	ばいばい　あいさつ
ヾ(^_^) byebye!!	ばいばい　あいさつ
(^^)/	おーい　じゃあ　どーも よろしく　あいさつ
(^-^)/	おーい　じゃあ　どーも よろしく　あいさつ
(^^)/~~~	ばいばい　あいさつ
(^_^)/	おーい　あいさつ
(//⌒ー⌒//)ﾉ゛	にこっ　あいさつ
～('-'*)	やぁ　あいさつ
(*^-^)ﾉ	ちわっ　あいさつ
ヾ(´ω｀＝´ω｀)ﾉ	おはよう　あいさつ
(o^-')b	ぐっ　ぐー　へんじ
(≧ω≦)b	ぐっ　ぐー　へんじ
(・∀・∩)	はい　へんじ
('-^*)ok	おっけー　へんじ

Face mark	Readings
(｀_´)ゞ了解！	りょうかい　へんじ
(。･_･。)ﾉ	やあ　あいさつ
(=゜ω゜)ﾉ	やあ　あいさつ

■ **笑う・うれしい(Smile/Glad)**

Face mark	Readings
(^-^)	にこっ　わらう
(^-^)v	にこっ　うれしい
(^o^)	うほほ　にこっ　わーい うれしい
o(^o^)o	うきうき　うれしい
(o^_^o)	にこっ　うれしい
(*^_^*)	にこっ　うれしい
(・∀・)	きたー　にこっ　わらう
ヾ(^▽^)ﾉ	わーい　うれしい
ヽ(´ー｀)ﾉ	わーい　うれしい
(*⌒▽⌒*)	にこっ　うれしい
(☆▽☆)	きらーん　うれしい

Face mark	Readings
(^^)v	やったね　ぴーす　にこっ ぶい　うれしい
(=^―^=)	にこっ　うれしい
(　´∀｀)	にこっ　うれしい
(≧∀≦)	うれしい
:)	にこっ　すまいる　わらう
V(^0^)	ぴーす　うれしい
(^з^)/ﾁｭｯ	ちゅっ　にこっ　わらう
((o(^-^)o))	わくわく　うれしい
(^^)	にこっ　わらう
v(^o^)	いえい　ぶい　ぴーす うれしい
(^_^)v	やったね　ぴーす　にこっ ぶい　うれしい
(^･^)	にこっ　わらう
(^0^)	わーい　わらう
(^0^)/	おーい　はーい　わらう
(^0^)v	やったね　ぴーす　にこっ ぶい　わらう
)^o^(	ほっぺがおちる　わらう
＼(^o^)／	わーい　わらう
:-)	にこっ　すまいる　わらう
ヽ(≧▽≦)/	きゃー　うれしい
d=(^o^)=b	ぐー　うれしい
ε=ヾ(*~▽~)ノ	きゃー　うれしい
(@^0^@)	うれしい
(　´艸｀)	むふふ　うれしい

■ 照れる・怒る(Shy/Angry)

Face mark	Readings
(^^ゞ	ぽりぽり　てれる
f(^_^)	てへ　てれる
(#^.^#)	にこっ　ぽっ　てれる
(*^.^*)	えへっ　てれる
(//▽//)	てれ　てれる
(*'-')	てへっ　てれる
(=°　ω°　=)	てへっ　てれる
(*´д｀*)	こまる　てれ　てれる
:p	てへっ　てれる
('∀')	うふふ　てれる
ヽ(*｀Д´)ノ	こら　ごるあ　ごるぁ おこる
o-_-)=○☆	ぽんち　おこる
(ノ-"-)ノ~┻━┻	ちゃぶだい　おこる
(-_-#)	こらっ　おこる
:-(	ふまん　おこる
Ψ(｀◇´)Ψ	こら　おこる
(ノ｀△´)ノ	こらっ　おこる
(●｀ε´●)	ぷんぷん　むかっ　おこる

■ 泣く・悲しい(Cry/Sorrow)

Face mark	Readings
(>_<)	あいた　いたい　いてー ひぇー　なく
(T^T)	うるうる　なく
(T_T)	しくしく　なく
(/_;)	しくしく　なく
(+_+)	びくっ　かなしい
(x_x;)	がっくり　かなしい
(/_･､)	くすん　なく
(つд｀)	ぐすん　なく
○|￣|＿	がっくし　かなしい
(´･ω･｀)	しょぼん　かなしい
(;0;)	しくしく　なく
(>_<。)	なく
(;_;)	しくしく　なく
(T-T)	なき　うるうる　なく
(TOT)	なき　うるうる　なく
(ノ_･。)	いたい　なく
:<	なく　かなしい
(;´д⊂)	なき　ぐすん　なく
゜･(ノД｀)･゜･	えーん　なく

■ 驚き(Surprised)

Face mark	Readings
(*_*)	びくっ　おどろき
(･･?	めがてん　おどろき
(･･;)	めがてん　おどろき
(゜-゜)	うーん　おどろき
(@_@)	びくっ　おどろき
(--;)	ぎくっ　おどろき
(-_☆)	きらーん　おどろき
(￣□￣;)!!	がーん　おどろき
(゜o゜;)	ぽかーん　おどろき
Σ(￣□￣)!	びっくり　がーん　ぎく おどろき
(￣◇￣;)	えっ　おどろき
ヽ(゜□゜;)ノ	えっ　おどろき
(;゜□゜)	えっ　おどろき
((((゜д゜;))))	がくがく　おどろき
(=_=;)	ぎくっ　てつや　おどろき
(･.･;)	めがてん　おどろき
(゜o゜)	ぎくっ　ぎょ　おどろき
(゜o゜;	ぎくっ　ぎょ　おどろき
(@_@。	びくっ　ぎょっ　おどろき

Face mark	Readings
(゜Д゜)	ぽかーん　おどろき
(゜_゜)	うーん　おどろき
(･｡･;	めがてん　おどろき
(･_･)	めがてん　おどろき
(･_･;	めがてん　おどろき
(･o･)	めがてん　おどろき
(゜o゜)/	おおー　びっくり　おどろき
(゜o゜;;	ぎくっ　おどろき
Σ(゜□゜;)	がーん　おどろき

■ 疑問・焦り(Question/Impatient)

Face mark	Readings
(^^;)	ぎくっ　あせ　あせり
(?_?)	なぜ　ぎもん
(-_-;)	ぎくっ　あせ　あせり
w=(゜o゜)=w	ぱたぱた　ぎもん
σ(^_^;)?	えっ　ぎもん
(;￢_￢)ｼﾞｰ	じー　ぎもん
0(><;)(;><)0	あたふた　あせり
(゜Д゜;≡;゜Д゜)	あたふた　あせり
^^;	ぎくっ　あせり
(^^;;	ぎくっ　あせ　あせり
(^_^;)	ぎくっ　あせ　あせり
(^-^;	ぎくっ　あせ　あせり
(~_~;)	ぎくっ　あせ　あせり
(¥_¥;	ぎくっ　あせ　ぎもん
(*_*;	びくっ　あせり
^_^;	ぎくっ　あせ　あせり
(?_?;	ぎくっ　なぜ　ぎもん
ε=┌(･_･)┘	にげる　あせり
(゜∇゜;)	ぎくっ　あせ　えっ　あせり
((○(>_<)○))	じたばた　あせり
(;゜0゜)	ぎくっ　あせ　あせり

■ その他(Others)

Face mark	Readings
(~▽~@)♪♪♪	うたう
('◇')ゞ	りょうかい　おっけー らじゃ
m(_ _)m	ぺこり
_(._.)_	ぺこり
<(_ _)>	ありがと　おねがい ごめん　ぺこり
≡≡≡ﾍ(*--)ﾉ	いそぐ　にげる
(^_^;))))))ｺｿｺｿ…	こそこそ
p(^-^)q	がんばれ　ふぁいと
;)	ういんく

Face mark	Readings
(^_-)	ういんく
(・∀・)ｲｲ	いい
(^人^)	かんしゃ　ありがとう
!(^^)!	ぴんぽーん
ヽ(^^)	よしよし　おい
(*≧m≦*)	ぷっ
(σ･∀･)σ	げっつ
(￣ー￣)	にやり
(・∀・)つ	どうぞ
(^-^)_旦～	どうぞ　おちゃ
(ψ゜□゜)ψ	きて　かもん　おいで
♪～(￣ε￣)	くちぶえ
(￣。￣)y-～～	たばこ
(｀・ω・´)	しゃきーん
⊂(・∀・)⊃	せーふ
(-.-;)y-~~~	いっぷく
(-。-)y-゜゜゜	いっぷく
(￣～￣)	うまい　たべる
(￣人￣)	おねがい
(^-^)人(^-^)	かんぱい　なかま　たっち
(i_i)＼(^_^)	よしよし
(^▽^)σ)~0~)	つんつん
～～(m´Д｀)m	たすけて
～～(m｀∀´)m	いひひ
φ(. _.)ﾒﾓﾒﾓ	めもめも　かきかき
(゜∇^)] ﾓｼﾓｼ	もしもし
(´□｀)	あーん
┐(￣∇￣;)┌	やれやれ
(´へ｀;)	はぁ　ためいき
(;-_-)=3	ためいき
(-"-;)	うーん
(´ー｀)	ふふん　じまん
(´￢｀)	よだれ
(￣ー+￣)ﾌｯ	ふっ
(~_~)	ほへー
(~o~)	ほへー
(p_-)	むしめがね
(-_-)	じとっ
(-.-)	じとっ
(-.-")凸	ちちち
(..)	どれどれ
[壁]_-)	ちらっ
(+｡+)	いたい
(-_-)zzz	ねてる　ねる
(_ _).oO	ねむい

Face mark	Readings
(´_ゝ`)	ふーん
(UoU)	ねむい
(^(I)^)	くま
U^I^U	いぬ

Face mark	Readings
ﾎﾟｲｯ(-__-)ﾉ⌒	ぽい
ヽ(°▽、°)ノ	よだれ
>°))))彡	さかな

List of symbols

One-byte	□ ! " # $ % & ' ( ) * + , - . / : ; < = > ? @ [¥] ^ _ ` { | } ~ 。「 」、・ - ゛ ゜
Two-byte	□、。，．・：；？！゛゜´｀¨＾￣＿ヽヾゝゞ〃仝々〆〇ー―‐／＼～‖｜…‥‘’“”（）〔〕［］｛｝〈〉《》「」『』【】＋－±×÷＝≠＜＞≦≧∞∴♂♀°′″℃￥＄ ¢￡％＃＆＊＠§☆★○●◎◇◆□■△▲▽▼※〒→←↑↓〓∈∋⊆⊇⊂⊃∪∩∧∨￢⇒ ⇔∀∃∠⊥⌒∂∇≡≒≪≫√∽∝∵∫∬Å‰♯♭♪†‡¶◯ＡＢＣＤＥＺＨΘＩＫΛＭＮ Ξ ＯΠＰΣＴＹΦＸΨΩαβγδεζηθικλμνξοπρστυφχψωＡБＢГД ＥЁЖЗИЙКЛМНОПРСТУФХЦЧШЩЪЫЬЭЮЯａбвгдеёжзийк лмнопрстуфхцчшщъыьэюя─│┌┐┘└├┬┤┴┼━┃┏┓┛┗┣┳ ┫┻┼┠┯┨┷┿┝┰┥┸╂①②③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲⑳ⅠⅡⅢⅣⅤⅥⅦ ⅧⅨⅩ ミリ キロ センチ メートル グラム トン アール ヘクタール リットル ワット カロリー ドル セント パーセント ミリバール ㎜ ㎝ ㎞ ㎎ ㎏ ㏄ ㎡ 平成 ㍉ ㍍ No. K.K. TEL ㊤㊥㊦㊧㊨㈱㈲㈹ 明治 大正 昭和 ≒≡∫∮Σ√⊥∠∟⊿∵∩∪

□: Indicates blank space (one-byte/two-byte).
• Some symbols above may look different from the displayed ones.

List of pictograms

Entering one of the following readings in hiragana/kanji mode allows to convert it.
• Entering “えもじ” also allows converting for Pictogram 1.
• Entering “えもじに” also allows converting for Pictogram 2.
• Pictograms used in mail may not be displayed correctly when sent to another party using a non i-mode terminal.
• Pictogram 2 used in mail may not be displayed correctly on some other terminals.

Pictogram 1

Pictogram	Readings
	はーと
	はーと
	しつれん　はーと
	はーと
	うれしい　にこ　かお
	おこる　いかり　むか　かお
	がっかり　かなしい　かお
	かなしい　かお
	ふらふら　かお
	いぬ　どうぶつ
	ねこ　どうぶつ

Pictogram	Readings
	はれ　てんき　たいよう
	くもり　てんき　くも
	あめ　てんき　かさ
	ゆき　てんき
	かみなり　てんき
	たいふう　てんき　うずまき
	きり　てんき
	こさめ　てんき　かさ
	るんるん　おんぷ　おんがく
	むーど　おんぷ　おんがく
	おんせん　ふろ　おふろ
	かわいい　はな

Pictogram	Readings
	きすまーく　きす　くち
	ぴかぴか　きらきら
	ひらめき　でんきゅう　ぴかぴか
	むか　いかり　おこる
	ぱんち　て　ぐー
	ばくだん
zzz	ねむい　ねむり　すいみん　ねる
!	びっくり
!?	びっくり　はてな
!!	びっくり

Pictogram	Readings
	どん　しょうげき
	あせ
	あせ
	だっしゅ
	ちょうおん
	ちょうおん
	けってい　おーけー おっけー
	みぎうえ　みぎななめうえ やじるし
	みぎした　みぎななめした やじるし
	ひだりうえ　ひだりなな めうえ　やじるし
	ひだりした　ひだりなな めした　やじるし
	ぐっど　やじるし
	ばっど　やじるし
	め
	みみ
	ぐー　て
	ちょき　ぷい　ぴーす　て
	ぱー　て
	あし
	はーと　とらんぷ
	すぺーど　とらんぷ
	だいや　とらんぷ
	くらぶ　くろーばー とらんぷ
	でんしゃ　のりもの てつどう
	ちかてつ　のりもの
	しんかんせん　のりもの
	くるま　のりもの じどうしゃ
	くるま　のりもの じどうしゃ
	ばす　くるま　のりもの
	ふね　のりもの
	ひこうき　のりもの くうこう
	りぞーと　よっと　のりもの
	くりすます　つりー
	いえ　じたく
	びる　かいしゃ
	ゆうびんきょく　ゆうびん
	びょういん
	ぎんこう

Pictogram	Readings
	えーてぃーえむ　ぎんこう
	ほてる
	こんびにえんすすとあ こんびに
	がそりんすたんど　がそりん がすすた　がそすた
	ちゅうしゃじょう ぱーきんぐ　ぱーく
	しんごう
	といれ
	れすとらん　しょくじ ごはん
	きっさてん　こーひー かっぷ　かふぇ
	ばー　かくてる　さけ
	びーる　さけ
	ふぁーすとふーど はんばーがー
	ぶてぃっく　くつ　ひーる
	びよういん　はさみ とこや
	からおけ　まいく
	えいが
	ゆうえんち　もくば
	おんがく　へっどほん
	あーと
	えんげき
	いべんと
	ちけっと　きっぷ
	すぽーつ　しゃつ
	やきゅう　すぽーつ ぼーる
	ごるふ　すぽーつ
	てにす　すぽーつ
	さっかー　すぽーつ　ぼーる
	すきー　すぽーつ
	ばすけっとぼーる　ばすけ ばすけっと　すぽーつ
	もーたーすぽーつ　ふらっぐ はた　すぽーつ
	ぼけっとべる　ぼけべる
	きつえん　たばこ
	きんえん　たばこ
	かめら
	かばん　ばっぐ
	ほん
	りぼん
	ぷれぜんと

Pictogram	Readings
	ばーすでー　ろうそく たんじょうび
	でんわ
	でんわ　けいたいでんわ けいたい　けーたい
	めーる
	めも
	てれび
	げーむ
	しーでぃー　おんがく
	くつ　すにーかー
	めがね
	くるまいす
	おひつじざ　せいざ
	おうしざ　せいざ
	ふたござ　せいざ
	かにざ　せいざ
	ししざ　せいざ
	おとめざ　せいざ
	てんびんざ　せいざ
	さそりざ　せいざ
	いてざ　せいざ
	やぎざ　せいざ
	みずがめざ　せいざ
	うおざ　せいざ
	しんげつ　つき
	つき
	はんげつ　つき
	みかづき　つき
	まんげつ　つき
	でんわ　けいたいでんわ けいたい　けーたい
	めーる
	ふぁっくす
	あいもーど
	あいもーど
	どこも
	どこも
	ゆうりょう　えん　おかね かね
	むりょう　ふりー
	あいでぃー
	ぱすわーど　かぎ　ろっく
	りたーん　えんたー
	くりあ
	さーち　むしめがね
	にゅー

Pictogram	Readings
	いちじょうほう　はた ふらっぐ
	ふりーだいやる
	しゃーぷだいやる
	もばきゅー
	いち　すうじ
	に　すうじ
	さん　すうじ
	よん　し　すうじ

Pictogram	Readings
	ご　すうじ
	ろく　すうじ
	なな　しち　すうじ
	はち　すうじ
	きゅー　きゅう　く すうじ
	ぜろ　れい　すうじ
	かちんこ　えいが
	ふくろ

Pictogram	Readings
	ぺん
	ひとかげ　ひと
	いす
	よる　つき
SOON	すーん
ON!	おん
end	えんど　おわり
	とけい　じかん

Pictogram 2

Pictogram	Readings
	じてんしゃ　のりもの
	れんち　こうぐ　しゅうり
	ぱそこん　ぴーしー
	えんぴつ
	くりっぷ
	さゆう　やじるし
	じょうげ　やじるし
	りさいくる
NG	えぬじー
秘	まるひ　ひみつ
禁	きんし
空	くうしつ　くうせき くうしゃ　あき
合	ごうかく
満	まんしつ　まんせき まんしゃ　まん
	きけん　けいこく　びっくり
©	こぴーらいと　しー
TM	とれーどまーく てぃーえむ
®	れじすたーどとれーど まーく　あーる
	あいあぷり
	あいあぷり
	どるぶくろ　おかね　かね
	うでどけい　とけい　じかん
	すなどけい　とけい
	おにぎり　おむすび
	しょーとけーき　けーき

Pictogram	Readings
	ぱん
	どんぶり　らーめん
	ゆのみ　おちゃ
	とっくり　にほんしゅ　さけ
	わいんぐらす　わいん　さけ
	ばなな　くだもの
	りんご　くだもの
	さくらんぼ　くだもの
	くろーばー　よつば　は はっぱ
	ちゅーりっぷ　はな
	め　は　はっぱ
	もみじ　は　はっぱ
	さくら　はな
	かたつむり　どうぶつ
	ひよこ　とり　どうぶつ
	ぺんぎん　どうぶつ
	さかな　どうぶつ
	うま　どうぶつ
	ぶた　どうぶつ
	てぃーしゃつ　しゃつ
	じーんず　じーぱん　ずぼん
	けしょう　くちべに
	ゆびわ　りんぐ
	おうかん
	ちゃぺる　べる　あらーむ
	どあ　とびら
	がっこう

Pictogram	Readings
	なみ　うみ
	ふじさん　やま
	すのぼ　すのーぼーど
	はしる　ひと　だっしゅ
	うーん　かお
	ほっ　にこ　かお
	あせ　かお
	あせ　かお
	むっ　むか　かお
	ぼけ　かお
	はーと　かお
	あっかんべー　べー　かお
	うぃんく　かお
	うれしい　にこ　かお
	がまん　かお
	ねこ　どうぶつ　かお
	えーん　かなしい　なく かお
	なみだ　かなしい　なく かお
	うまい　おいしい　かお
	うっしっし　うれしい　かお
	げっそり　さけび　かお
	おーけー　ぐっど　て おっけー
	らぶれたー　てがみ めーる
	さいふ　おかね　かね

KUTEN code input list

• Some of the following may look different from the displayed ones.

1st to 3rd digit	4th digit figure of the JIS Kanji code									
	0	1	2	3	4	5	6	7	8	9
010		(ﾊﾟ-ﾗ)								
011	！	″	。	。	、	：	；	―	；	？
012	゛	゜	゛	〃	仝	々	〆	○	―	―
013	‐	／	＼	～	‖	｜	…	‥	‘	’
014	“	”	（	）	〔	〕	［	］	｛	｝
015	〈	〉	《	》	「	」	『	』	【	】
016	＋	－	±	×	÷	＝	≠	＜	＞	≦
017	≧	∞	∴	♂	♀	°	′	″	℃	￥
018	$	¢	£	%	#	&	＊	@	§	☆
019	★	○	●	◎	◇					
020		◆	□	■	△	▲	▽	▼	※	〒
021	→	←	↑	↓	＝					
022							∈	∋	⊆	⊇
023	⊂	⊃	∪	∩						
024			∧	∨	￢	⇒	⇔	∀	∃	
026	∠	⊥	⌒	∂	∇	≡	≒	≪	≫	√
027	∽	∝	∵	∫	∫∫					
028			Å	‰	♯					
029					○	♭	♪	†	‡	¶
031							0	1	2	3
032	4	5	6	7	8	9				
033				A	B	C	D	E	F	G
034	H	I	J	K	L	M	N	O	P	Q
035	R	S	T	U	V	W	X	Y	Z	
036						a	b	c	d	e
037	f	g	h	i	j	k	l	m	n	o
038	p	q	r	s	t	u	v	w	x	y
039	z									
040		ぁ	あ	ぃ	い	ぅ	う	ぇ	え	ぉ
041	お	か	ゃ	き	し	ぎ	じ	ぐ	ず	つ
042	ご	そ	た	ぢ	っ	つ	づ	て	で	と
043	ど	な	に	ぬ	ね	の	は	ば	ぱ	ひ
044	び	ぴ	ふ	ぶ	ぷ	へ	べ	ぺ	ほ	ぼ
045	ぽ	ま	み	む	め	も	ゃ	や	ゅ	ゆ
046	ょ	よ	ら	り	る	れ	ゎ	わ	ゐ	ゑ
047	を	ん	ゔ	ゕ	ゖ					
048		゛	゜	ゝ	ゞ	ー	／＼	／｀	［＊］	［＃］
050		ア	イ	ィ	ウ	ヴ	ェ	エ	ォ	オ
051	カ	ガ	キ	ギ	ク	グ	ケ	ゲ	コ	ゴ
052	サ	ザ	シ	ジ	ス	ズ	セ	ゼ	ソ	ゾ
053	タ	ダ	チ	ヂ	ッ	ツ	テ	デ	ト	ド
054	ナ	ニ	ヌ	ネ	ノ	ハ	バ	パ	ヒ	ビ
055	ピ	フ	ブ	プ	ヘ	ベ	ペ	ホ	ボ	ポ
056	マ	ミ	ム	メ	モ	ャ	ヤ	ュ	ユ	ョ
057	ヨ	ラ	リ	ル	レ	ロ	ヮ	ワ	ヰ	ヱ
058	ヲ	ン	ヴ	ヵ	ヶ	・	ー	／＼	／｀	［＊］
060		A	B	Γ	Δ	Ε	Ζ	Η	Θ	Ι
061	Κ	Λ	Μ	Ν	Ξ	Ο	Π	Ρ	Σ	Τ
062	Υ	Φ	Χ	Ψ	Ω					
063				α	β	γ	δ	ε	ζ	η
064	θ	ι	κ	λ	μ	ν	ξ	ο	π	ρ
065	σ	τ	υ	φ	χ	ψ	ω			
070		А	Б	В	Г	Д	Е	Ё	Ж	З
071	И	Й	К	Л	М	Н	О	П	Р	С
072	Т	У	Ф	Х	Ц	Ч	Ш	Щ	Ъ	Ы
073	Ь	Э	Ю	Я						
074										а
075	б	в	г	д	е	ё	ж	з	и	й
076	к	л	м	н	о	п	р	с	т	у
077	ф	х	ц	ч	ш	щ	ъ	ы	ь	э
078	ю	я								
080			─	│	┌	┐	┘	└	├	┬	┤
081	┴	┼	━	┃	┏	┓	┛	┗	┣	┳	┫
082	┻	╋	┠	┯	┨	┷	┿	┝	┰	┥

1st to 3rd digit	4th digit figure of the JIS Kanji code									
	0	1	2	3	4	5	6	7	8	9
083	┷	┠	┼							
130		①	②	③	④	⑤	⑥	⑦	⑧	⑨
131	⑩	⑪	⑫	⑬	⑭	⑮	⑯	⑰	⑱	⑲
132	⑳	Ⅰ	Ⅱ	Ⅲ	Ⅳ	Ⅴ	Ⅵ	Ⅶ	Ⅷ	Ⅸ
133	Ⅹ		㍑	㌔	㌍	㌢	㍍	㌘	㌧	㍊
134	㌃	㌶	㍼	㌍	㎝	㎞	㎏	㎝²	㎡	㎜
135	㎝	㎎	㎏	㏄	㎡					
136				平成		〃	No.	K.K.	TEL	㈱
137	㈱	㈲	㈱	㈱	㈱	㈲	㈹	〽	大正	昭和
138	≒	≡	∫	∮	Σ	√	⊥	∠	∟	⊿
139	∵	∩	∪							
	あ									
160		亜	唖	娃	阿	哀	愛	挨	姶	逢
161	葵	茜	穐	悪	握	渥	旭	葦	芦	鯵
162	梓	圧	斡	扱	宛	姐	虻	飴	絢	綾
163	鮎	或	粟	袷	安	庵	按	暗	案	闇
164	鞍	杏								
	い									
164			以	伊	位	依	偉	囲	夷	委
165	威	尉	惟	意	慰	易	椅	為	畏	異
166	移	維	緯	胃	萎	衣	謂	違	遺	医
167	井	亥	域	育	郁	磯	一	壱	溢	逸
168	稲	茨	芋	鰯	允	印	咽	員	因	姻
169	引	飲	淫	胤	蔭					
170		院	陰	隠	韻	吋				
	う									
170							右	宇	烏	羽
171	迂	雨	卯	鵜	窺	丑	碓	臼	渦	嘘
172	唄	欝	蔚	鰻	姥	厩	浦	瓜	閏	噂
173	云	運	雲							
	え									
173				荏	餌	叡	営	嬰	影	映
174	曳	栄	永	泳	洩	瑛	盈	穎	頴	英
175	衛	詠	鋭	液	疫	益	駅	悦	謁	越
176	閲	榎	厭	円	園	堰	奄	宴	延	怨
177	掩	援	沿	演	炎	焔	煙	燕	猿	縁
178	艶	苑	薗	遠	鉛	鴛	塩			
	お									
178								於	汚	甥
179	凹	央	奥	往	応					
180		押	旺	横	欧	殴	王	翁	襖	鴬
181	鴎	黄	岡	沖	荻	億	屋	憶	臆	桶
182	牡	乙	俺	卸	恩	温	穏	音		
	か									
182									下	化
183	仮	何	伽	価	佳	加	可	嘉	夏	嫁
184	家	寡	科	暇	果	架	歌	河	火	珂
185	禍	禾	稼	箇	花	苛	茄	荷	華	菓
186	蝦	課	嘩	貨	迦	過	霞	蚊	俄	峨
187	我	牙	画	臥	芽	蛾	賀	雅	餓	駕
188	介	会	解	回	塊	壊	廻	快	怪	悔
189	恢	懐	戒	拐	改					
190		魁	晦	械	海	灰	界	皆	絵	芥
191	蟹	開	階	貝	凱	劾	外	咳	害	崖
192	慨	概	涯	碍	蓋	街	該	鎧	骸	浬
193	馨	蛙	垣	柿	蛎	鈎	劃	嚇	各	廓
194	拡	撹	格	核	殻	獲	確	穫	覚	角
195	赫	較	郭	閣	隔	革	学	岳	楽	額
196	顎	掛	笠	樫	橿	梶	鰍	潟	割	喝
197	恰	括	活	渇	滑	葛	褐	轄	且	鰹
198	叶	椛	樺	鞄	株	兜	竈	蒲	釜	鎌
199	噛	鴨	栢	茅	萱					
200		粥	刈	苅	瓦	乾	侃	冠	寒	刊
201	勘	勧	巻	喚	堪	姦	完	官	寛	干
202	幹	患	感	慣	憾	換	敢	柑	桓	棺
203	款	歓	汗	漢	澗	潅	環	甘	監	莞
204	笑	管	簡	緩	缶	翰	肝	艦	観	貫
205	諫	貫	還	鑑	間	閑	関	陥	韓	館
206	舘	丸	含	岸	巌	玩	癌	眼	岩	翫

1st to 3rd digit	4th digit figure of the JIS Kanji code									
	0	1	2	3	4	5	6	7	8	9
207	贋	雁	頑	顔	願					
	き									
207						企	伎	危	喜	器
208	基	奇	嬉	寄	岐	希	幾	忌	揮	机
209	旗	既	期	棋	棄					
210		機	帰	毅	気	汽	畿	祈	季	稀
211	紀	徽	規	記	貴	起	軌	輝	飢	騎
212	鬼	亀	偽	儀	妓	宜	戯	技	擬	欺
213	犠	疑	祇	義	蟻	誼	議	掬	菊	鞠
214	吉	吃	喫	桔	橘	詰	砧	杵	黍	却
215	客	脚	虐	逆	丘	久	仇	休	及	吸
216	宮	弓	急	救	朽	求	汲	泣	灸	球
217	究	窮	笈	級	糾	給	旧	牛	去	居
218	巨	拒	拠	挙	渠	虚	許	距	鋸	漁
219	禦	魚	亨	享	京					
220		供	侠	僑	兇	競	共	凶	協	匡
221	卿	叫	喬	境	峡	強	彊	怯	恐	恭
222	挟	教	橋	況	狂	狭	矯	胸	脅	興
223	蕎	郷	鏡	響	饗	驚	仰	凝	尭	暁
224	業	局	曲	極	玉	桐	粁	僅	勤	均
225	巾	錦	斤	欣	欽	琴	禁	禽	筋	緊
226	芹	菌	衿	襟	謹	近	金	吟	銀	
	く									
226										九
227	倶	句	区	狗	玖	矩	苦	躯	駆	駈
228	駒	具	愚	虞	喰	空	偶	寓	遇	隅
229	串	櫛	釧	屑	屈					
230		掘	窟	沓	靴	轡	窪	熊	隈	粂
231	栗	繰	桑	鍬	勲	君	薫	訓	群	軍
232	郡									
	け									
232		卦	袈	祁	係	傾	刑	兄	啓	圭
233	珪	型	契	形	径	恵	慶	慧	憩	掲
234	携	敬	景	桂	渓	畦	稽	系	経	継
235	繋	罫	茎	荊	蛍	計	詣	警	軽	頚
236	鶏	芸	迎	鯨	劇	戟	撃	激	隙	桁
237	傑	欠	決	潔	穴	結	血	訣	月	件
238	倹	倦	健	兼	券	剣	喧	圏	堅	嫌
239	建	憲	懸	拳	捲					
240		検	権	牽	犬	献	研	硯	絹	県
241	肩	見	謙	賢	軒	遣	鍵	険	顕	験
242	鹸	元	原	厳	幻	弦	減	源	玄	現
243	絃	舷	言	諺	限					
	こ									
243						乎	個	古	呼	固
244	姑	孤	己	庫	弧	戸	故	枯	湖	狐
245	糊	袴	股	胡	菰	虎	誇	跨	鈷	雇
246	顧	鼓	五	互	伍	午	碁	呉	吾	娯
247	御	悟	梧	檎	瑚	碁	誤	護	醐	功
248	乞	鯉	交	佼	口	向	候	候	倖	光
249	効	勾	厚	坑	垢					
250		后	喉	坑	垢	好	孔	孝	宏	工
251	巧	巷	幸	広	庚	康	弘	恒	慌	抗
252	拘	控	攻	昂	晃	更	杭	校	梗	構
253	江	洪	浩	港	溝	甲	皇	硬	稿	糠
254	紅	紘	絞	綱	耕	考	肯	肱	腔	膏
255	航	荒	行	衡	講	貢	購	郊	酵	鉱
256	砿	鋼	閤	降	項	香	高	鴻	剛	劫
257	号	合	壕	拷	濠	豪	轟	麹	克	刻
258	告	国	穀	酷	鵠	黒	獄	漉	腰	甑
259	忽	惚	骨	狛	込					
260		此	頃	今	困	坤	墾	婚	恨	懇
261	昏	昆	根	梱	混	痕	紺	艮	魂	
	さ									
261										些
262	佐	叉	唆	嵯	左	差	査	沙	瑳	砂
263	詐	鎖	裟	坐	座	挫	債	催	再	最
264	哉	塞	妻	宰	彩	才	採	栽	歳	済
265	災	采	犀	砕	砦	祭	斎	細	菜	裁
266	載	際	剤	在	材	罪	財	冴	坂	阪

1st to 3rd digit	4th digit figure of the JIS Kanji code									
	0	1	2	3	4	5	6	7	8	9
267	堺	榊	肴	咲	崎	埼	碕	鷺	作	削
268	咋	搾	昨	朔	柵	窄	策	索	錯	桜
269	鮭	笹	匙	冊	刷					
270		察	拶	撮	擦	札	殺	薩	雑	皐
271	鯖	捌	錆	鮫	皿	晒	三	傘	参	山
272	惨	撒	散	桟	燦	珊	産	算	纂	蚕
273	讃	賛	酸	餐	斬	暫	残			
	し									
273								仕	仔	伺
274	使	刺	司	史	嗣	四	士	始	姉	姿
275	子	屍	市	師	志	思	指	支	孜	斯
276	施	旨	枝	止	死	氏	獅	祉	私	糸
277	紙	紫	肢	脂	至	視	詞	詩	試	誌
278	諮	資	賜	雌	飼	歯	事	似	侍	児
279	字	寺	慈	持	時					
280		次	滋	治	爾	璽	痔	磁	示	而
281	耳	自	蒔	辞	汐	鹿	式	識	鴫	竺
282	軸	宍	雫	七	叱	執	失	嫉	室	悉
283	湿	漆	疾	質	実	蔀	篠	偲	柴	芝
284	屡	蕊	縞	舎	写	射	捨	赦	斜	煮
285	社	紗	者	謝	車	遮	蛇	邪	借	勺
286	尺	杓	灼	爵	酌	釈	錫	若	寂	弱
287	惹	主	取	守	手	朱	殊	狩	珠	種
288	腫	趣	酒	首	儒	受	呪	寿	授	樹
289	綬	需	囚	収	周					
290		宗	就	州	修	愁	拾	洲	秀	秋
291	終	繍	習	臭	舟	蒐	衆	襲	讐	蹴
292	輯	週	酋	酬	集	醜	什	住	充	十
293	従	戎	柔	汁	渋	獣	縦	重	銃	叔
294	夙	宿	淑	祝	縮	粛	塾	熟	出	術
295	述	俊	峻	春	瞬	竣	舜	駿	准	循
296	旬	楯	殉	淳	準	潤	盾	純	巡	遵
297	醇	順	処	初	所	暑	曙	渚	庶	緒
298	署	書	薯	藷	諸	助	叙	女	序	徐
299	恕	鋤	除	傷	償					
300		勝	匠	升	召	哨	商	唱	嘗	奨
301	妾	娼	宵	将	小	少	尚	庄	床	廠
302	彰	承	抄	招	掌	捷	昇	昌	昭	晶
303	松	梢	樟	樵	沼	消	渉	湘	焼	焦
304	照	症	省	硝	礁	祥	称	章	笑	粧
305	紹	肖	菖	蒋	蕉	衝	裳	訟	証	詔
306	詳	象	賞	醤	鉦	鍾	鐘	障	鞘	上
307	丈	丞	乗	冗	剰	城	場	壌	嬢	常
308	情	擾	条	杖	浄	状	畳	穣	蒸	譲
309	醸	錠	嘱	埴	飾					
310		拭	植	殖	燭	織	職	色	触	食
311	蝕	辱	尻	伸	信	侵	唇	娠	寝	審
312	心	慎	振	新	晋	森	榛	浸	深	申
313	疹	真	神	秦	紳	臣	芯	薪	親	診
314	身	辛	進	針	震	人	仁	刃	塵	壬
315	尋	甚	尽	腎	訊	迅	陣	靭		
	す									
315									笥	諏
316	須	酢	図	厨	逗	吹	垂	帥	推	水
317	炊	睡	粋	翠	衰	遂	酔	錐	錘	随
318	瑞	髄	崇	嵩	数	枢	趨	雛	据	杉
319	椙	菅	頗	雀	裾					
320		澄	摺	寸						
	せ									
320					世	瀬	畝	是	凄	制
321	勢	姓	征	性	成	政	整	星	晴	棲
322	栖	正	清	牲	生	盛	精	聖	声	製
323	西	誠	誓	請	逝	醒	青	静	斉	税
324	脆	隻	席	惜	戚	斥	昔	析	石	積
325	籍	績	脊	責	赤	跡	蹟	碩	切	拙
326	接	摂	折	設	窃	節	説	雪	絶	舌
327	蝉	仙	先	千	占	宣	専	尖	川	戦
328	扇	撰	栓	栴	泉	浅	洗	染	潜	煎
329	煽	旋	穿	箭	線					
330		繊	羨	腺	舛	船	薦	詮	賎	践
331	選	遷	銭	銑	閃	鮮	前	善	漸	然
332	全	禅	繕	膳	糎					
	そ									
332						噌	塑	岨	措	曾
333	曽	楚	狙	疏	疎	礎	祖	租	粗	素
334	組	蘇	訴	阻	遡	鼠	僧	創	双	叢
335	倉	喪	壮	奏	爽	宋	層	匝	惣	想

1st to 3rd digit	4th digit figure of the JIS Kanji code									
	0	1	2	3	4	5	6	7	8	9
336	捜	掃	挿	掻	操	早	曹	巣	槍	槽
337	漕	燥	争	痩	相	窓	糟	総	綜	聡
338	草	荘	葬	蒼	藻	装	走	送	遭	鎗
339	霜	騒	像	増	憎					
340		臓	蔵	贈	造	促	側	則	即	息
341	捉	束	測	足	速	俗	属	賊	族	続
342	卒	袖	其	揃	存	孫	尊	損	村	遜
	た									
343	他	多	太	汰	詑	唾	堕	妥	惰	打
344	柁	舵	楕	陀	駄	騨	体	堆	対	耐
345	岱	帯	待	怠	態	戴	替	泰	滞	胎
346	腿	苔	袋	貸	退	逮	隊	黛	鯛	代
347	台	大	第	醍	題	鷹	滝	瀧	卓	啄
348	宅	托	択	拓	沢	濯	琢	託	鐸	濁
349	諾	茸	凧	蛸	只					
350		叩	但	達	辰	奪	脱	巽	竪	辿
351	棚	谷	狸	鱈	樽	誰	丹	単	嘆	坦
352	担	探	旦	歎	淡	湛	炭	短	端	箪
353	綻	耽	胆	蛋	誕	鍛	団	壇	弾	断
354	暖	檀	段	男	談					
	ち									
354						値	知	地	弛	恥
355	智	池	痴	稚	置	致	蜘	遅	馳	築
356	畜	竹	筑	蓄	逐	秩	窒	茶	嫡	着
357	中	仲	宙	忠	抽	昼	柱	注	虫	衷
358	註	酎	鋳	駐	樗	瀦	猪	苧	著	貯
359	丁	兆	凋	喋	寵					
360		帖	帳	庁	弔	張	彫	徴	懲	挑
361	暢	朝	潮	牒	町	眺	聴	脹	腸	蝶
362	調	諜	超	跳	銚	長	頂	鳥	勅	捗
363	直	朕	沈	珍	賃	鎮	陳			
	つ									
363								津	墜	椎
364	槌	追	鎚	痛	通	塚	栂	掴	槻	佃
365	漬	柘	辻	蔦	綴	鍔	椿	潰	坪	壷
366	嬬	紬	爪	吊	釣	鶴				
	て									
366							亭	低	停	偵
367	剃	貞	呈	堤	定	帝	底	庭	廷	弟
368	悌	抵	挺	提	梯	汀	碇	禎	程	締
369	艇	訂	諦	蹄	逓					
370		邸	鄭	釘	鼎	泥	摘	擢	敵	滴
371	的	笛	適	鏑	溺	哲	徹	撤	轍	迭
372	鉄	典	填	天	展	店	添	纏	甜	貼
373	転	顛	点	伝	殿	澱	田	電		
	と									
373									兎	吐
374	堵	塗	妬	屠	徒	斗	杜	渡	登	菟
375	賭	途	都	鍍	砥	砺	努	度	土	奴
376	怒	倒	党	冬	凍	刀	唐	塔	塘	套
377	宕	島	嶋	悼	投	搭	東	桃	梼	棟
378	盗	淘	湯	涛	灯	燈	当	痘	祷	等
379	答	筒	糖	統	到					
380		董	蕩	藤	討	謄	豆	踏	逃	透
381	鐙	陶	頭	騰	闘	働	動	同	堂	導
382	憧	撞	洞	瞳	童	胴	萄	道	銅	峠
383	鴇	匿	得	徳	涜	特	督	禿	篤	毒
384	独	読	栃	橡	凸	突	椴	届	鳶	苫
385	寅	酉	瀞	噸	屯	惇	敦	沌	豚	遁
386	頓	呑	曇	鈍						
	な									
386					奈	那	内	乍	凪	薙
387	謎	灘	捺	鍋	楢	馴	縄	畷	南	楠
388	軟	難	汝							
	に									
388				二	尼	弐	迩	匂	賑	肉
389	虹	廿	日	乳	入					
390		如	尿	韮	任	妊	忍	認		
	ぬ									
390									濡	
	ね									
390										禰
391	祢	寧	葱	猫	熱	年	念	捻	撚	燃
392	粘									
	の									
392		乃	廼	之	埜	嚢	悩	濃	納	能
393	脳	膿	農	覗	蚤					

1st to 3rd digit	4th digit figure of the JIS Kanji code									
	0	1	2	3	4	5	6	7	8	9
	は									
393						巴	把	播	覇	杷
394	波	派	琶	破	婆	罵	芭	馬	俳	廃
395	拝	排	敗	杯	盃	牌	背	肺	輩	配
396	倍	培	媒	梅	楳	煤	狽	買	売	賠
397	陪	這	蝿	秤	矧	萩	伯	剥	博	拍
398	柏	泊	白	箔	粕	舶	薄	迫	曝	漠
399	爆	縛	莫	駁	麦					
400		函	箱	硲	箸	肇	筈	櫨	幡	肌
401	畑	畠	八	鉢	溌	発	醗	髪	伐	罰
402	抜	筏	閥	鳩	噺	塙	蛤	隼	伴	判
403	半	反	叛	帆	搬	斑	板	氾	汎	版
404	犯	班	畔	繁	般	藩	販	範	釆	煩
405	頒	飯	挽	晩	番	盤	磐	蕃	蛮	
	ひ									
405										匪
406	卑	否	妃	庇	彼	悲	扉	批	披	斐
407	比	泌	疲	皮	碑	秘	緋	罷	肥	被
408	誹	費	避	非	飛	樋	簸	備	尾	微
409	枇	毘	琵	眉	美					
410		鼻	柊	稗	匹	疋	髭	彦	膝	菱
411	肘	弼	必	畢	筆	逼	桧	姫	媛	紐
412	百	謬	俵	彪	標	氷	漂	瓢	票	表
413	評	豹	廟	描	病	秒	苗	錨	鋲	蒜
414	蛭	鰭	品	彬	斌	浜	瀕	貧	賓	頻
415	敏	瓶								
	ふ									
415			不	付	埠	夫	婦	富	冨	布
416	府	怖	扶	敷	斧	普	浮	父	符	腐
417	膚	芙	譜	負	賦	赴	阜	附	侮	撫
418	武	舞	葡	蕪	部	封	楓	風	葺	蕗
419	伏	副	復	幅	服					
420		福	腹	複	覆	淵	弗	払	沸	仏
421	物	鮒	分	吻	噴	墳	憤	扮	焚	奮
422	粉	糞	紛	雰	文	聞				
	へ									
422							丙	併	兵	塀
423	幣	平	弊	柄	並	蔽	閉	陛	米	頁
424	僻	壁	癖	碧	別	瞥	蔑	箆	偏	変
425	片	篇	編	辺	返	遍	便	勉	娩	弁
426	鞭									
	ほ									
426		保	舗	鋪	圃	捕	歩	甫	補	輔
427	穂	募	墓	慕	戊	暮	母	簿	菩	倣
428	俸	包	呆	報	奉	宝	峰	峯	崩	庖
429	抱	捧	放	方	朋					
430		法	泡	烹	砲	縫	胞	芳	萌	蓬
431	蜂	褒	訪	豊	邦	鋒	飽	鳳	鵬	乏
432	亡	傍	剖	坊	妨	帽	忘	忙	房	暴
433	望	某	棒	冒	紡	肪	膨	謀	貌	貿
434	鉾	防	吠	頬	北	僕	卜	墨	撲	朴
435	牧	睦	穆	釦	勃	没	殆	堀	幌	奔
436	本	翻	凡	盆						
	ま									
436					摩	磨	魔	麻	埋	妹
437	昧	枚	毎	哩	槙	幕	膜	枕	鮪	柾
438	鱒	桝	亦	俣	又	抹	末	沫	迄	侭
439	繭	麿	万	慢	満					
440		漫	蔓							
	み									
440				味	未	魅	巳	箕	岬	密
441	蜜	湊	蓑	稔	脈	妙	粍	民	眠	
	む									
441										務
442	夢	無	牟	矛	霧	鵡	椋	婿	娘	
	め									
442										冥
443	名	命	明	盟	迷	銘	鳴	姪	牝	滅
444	免	棉	綿	緬	面	麺				
	も									
444							摸	模	茂	妄
445	孟	毛	猛	盲	網	耗	蒙	儲	木	黙
446	目	杢	勿	餅	尤	戻	籾	貰	問	悶
447	紋	門	匁							
	や									
447				也	冶	夜	爺	耶	野	弥
448	矢	厄	役	約	薬	訳	躍	靖	柳	藪

1st to 3rd digit	4th digit figure of the JIS Kanji code									
	0	1	2	3	4	5	6	7	8	9
449	鑓									
	ゆ									
449		愉	愈	油	癒					
450		諭	輸	唯	佑	優	勇	友	宥	幽
451	悠	憂	揖	有	柚	湧	涌	猶	猷	由
452	祐	裕	誘	遊	邑	郵	雄	融	夕	
	よ									
452										予
453	余	与	誉	輿	預	傭	幼	妖	容	庸
454	揚	揺	擁	曜	楊	様	洋	溶	熔	用
455	窯	羊	耀	葉	蓉	要	謡	踊	遥	陽
456	養	慾	抑	欲	沃	浴	翌	翼	淀	
	ら									
456										羅
457	螺	裸	来	莱	頼	雷	洛	絡	落	酪
458	乱	卵	嵐	欄	濫	藍	蘭	覧		
	り									
458									利	吏
459	履	李	梨	理	璃					
460		痢	裏	裡	里	離	陸	律	率	立
461	葎	掠	略	劉	流	溜	琉	留	硫	粒
462	隆	竜	龍	侶	慮	旅	虜	了	亮	僚
463	両	凌	寮	料	梁	涼	猟	療	瞭	稜
464	糧	良	諒	遼	量	陵	領	力	緑	倫
465	厘	林	淋	燐	琳	臨	輪	隣	鱗	麟
	る									
466	瑠	塁	涙	累	類					
	れ									
466						令	伶	例	冷	励
467	嶺	怜	玲	礼	苓	鈴	隷	零	霊	麗
468	齢	暦	歴	列	劣	烈	裂	廉	恋	憐
469	漣	煉	簾	練	聯					
470		蓮	連	錬						
	ろ									
470					呂	魯	櫓	炉	賂	路
471	露	労	婁	廊	弄	朗	楼	榔	浪	漏
472	牢	狼	篭	老	聾	蝋	郎	六	麓	禄
473	肋	録	論							
	わ									
473				倭	和	話	歪	賄	脇	惑
474	枠	鷲	亙	亘	鰐	詫	藁	蕨	椀	湾
475	碗	腕								
480		弌	丐	丕	个	丱	丶	丼	丿	乂
481	乖	乘	亂	亅	豫	亊	舒	弍	于	亞
482	亟	亠	亢	亰	亳	亶	从	仍	仄	仆
483	仂	仗	仞	仭	仟	价	伉	佚	估	佛
484	佝	佗	佇	佶	侈	侏	侘	佻	佩	佰
485	侑	佯	來	侖	儘	俔	俟	俎	俘	俛
486	俑	俚	俐	俤	俥	倚	倨	倔	倪	倥
487	倅	伜	俶	倡	倩	倬	俾	俯	們	倆
488	偃	假	會	偕	偐	偈	做	偖	偬	偸
489	傀	傚	傅	傴	傲					
490		僉	僊	傳	僂	僖	僞	僥	僭	僣
491	僮	價	僵	儉	儁	儂	儖	儕	儔	儚
492	儡	儺	儷	儼	儻	儿	兀	兒	兌	兔
493	兢	竸	兩	兪	兮	冀	冂	囘	册	冉
494	冏	冑	冓	冕	冖	冤	冦	冢	冩	冪
495	冫	决	冱	冲	冰	况	冽	凅	凉	凛
496	几	處	凩	凭	凰	凵	凾	刄	刋	刔
497	刎	刧	刪	刮	刳	刹	剏	剄	剋	剌
498	剞	剔	剪	剴	剩	剳	剿	剽	劍	劔
499	劒	剱	劈	劑	辨					
500		辧	劬	劭	劼	劵	勁	勍	勗	勞
501	勣	勦	飭	勠	勳	勵	勸	勹	匆	匈
502	甸	匍	匐	匏	匕	匚	匣	匯	匱	匳
503	匸	區	卆	卅	丗	卉	卍	凖	卞	卩
504	卮	夘	卻	卷	厂	厖	厠	厦	厥	厮
505	厰	厶	參	簒	雙	叟	曼	燮	叮	叨
506	叭	叺	吁	吽	呀	听	吭	吼	吮	吶
507	吩	吝	呎	咏	呵	咎	呟	呱	呷	呰
508	咒	呻	咀	呶	咄	咐	咆	哇	咢	咸
509	咥	咬	哄	哈	咨					
510		咫	哂	咤	咾	咼	哘	哥	哦	唏
511	唔	哽	哮	哭	哺	哢	唹	啀	啣	啌
512	售	啜	啅	啖	啗	唸	唳	啝	喙	喀

1st to 3rd digit	4th digit figure of the JIS Kanji code									
	0	1	2	3	4	5	6	7	8	9
513	咯	喊	喟	啻	啾	喘	喞	單	啼	喃
514	喩	喇	喨	嗚	嗅	嗟	嗄	嗜	嗤	嗔
515	嘔	嗷	嘖	嗾	嗽	嘛	嗹	噎	噐	營
516	嘴	嘶	嘲	嘸	噫	噤	嘯	噬	噪	嚆
517	嚀	嚊	嚠	嚔	嚏	嚥	嚮	嚶	嚴	囂
518	嚼	囁	囃	囀	囈	囎	囑	囓	囗	囮
519	囹	圀	囿	圄	圉					
520		圈	國	圍	圓	團	圖	嗇	圜	圦
521	圷	圸	坎	圻	址	坏	坩	埀	垈	坡
522	坿	垉	垓	垠	垳	垤	垪	垰	埃	埆
523	埔	埒	埓	堊	埖	埣	堋	堙	堝	塲
524	堡	塢	塋	塰	毀	塒	堽	塹	墅	墹
525	墟	墫	墺	壞	墻	墸	墮	壅	壓	壑
526	壗	壙	壘	壥	壜	壤	壟	壯	壺	壹
527	壻	壼	壽	夂	夊	夐	夛	梦	夥	夬
528	夭	夲	夸	夾	竒	奕	奐	奎	奚	奘
529	奢	奠	奧	奬	奩					
530		奸	妁	妝	佞	侫	妣	妲	姆	姨
531	姜	妍	姙	姚	娥	娟	娑	娜	娉	娚
532	婀	婬	婉	娵	娶	婢	婪	媚	媼	媾
533	嫋	嫂	媽	嫣	嫗	嫦	嫩	嫖	嫺	嫻
534	嬌	嬋	嬖	嬲	嫐	嬪	嬶	嬾	孃	孅
535	孀	孑	孕	孚	孛	孥	孩	孰	孳	孵
536	學	斈	孺	宀	它	宦	宸	寃	寇	寉
537	寔	寐	寤	實	寢	寞	寥	寫	寰	寶
538	寳	尅	將	專	對	尓	尠	尢	尨	尸
539	尹	屁	屆	屎	屓					
540		屐	屏	孱	屬	屮	乢	屶	屹	岌
541	岑	岔	妛	岫	岻	岶	岼	岷	峅	岾
542	峇	峙	峩	峽	峺	峭	嶌	峪	崋	崕
543	崗	嵜	崟	崛	崑	崔	崢	崚	崙	崘
544	嵌	嵒	嵎	嵋	嵬	嵳	嵶	嶇	嶄	嶂
545	嶢	嶝	嶬	嶮	嶽	嶐	嶷	嶼	巉	巍
546	巓	巒	巖	巛	巫	已	巵	帋	帚	帙
547	帑	帛	帶	帷	幄	幃	幀	幎	幗	幔
548	幟	幢	幤	幇	幵	并	幺	麼	广	庠
549	廁	廂	廈	廐	廏					
550		廖	廣	廝	廚	廛	廢	廡	廨	廩
551	廬	廱	廳	廰	廴	廸	廾	弃	弉	彝
552	彜	弋	弑	弖	弩	弭	弸	彁	彈	彌
553	彎	弯	彑	彖	彗	彙	彡	彭	彳	彷
554	徃	徂	彿	徊	很	徑	徇	從	徙	徘
555	徠	徨	徭	徼	忖	忻	忤	忸	忱	忝
556	悳	忿	怡	恠	怙	怐	怩	怎	怱	怛
557	怕	怫	怦	怏	怺	恚	恁	恪	恷	恟
558	恊	恆	恍	恣	恃	恤	恂	恬	恫	恙
559	悁	悍	惧	悃	悚					
560		悄	悛	悖	悗	悒	悧	悋	惡	悸
561	惠	惓	悴	忰	悽	惆	悵	惘	慍	愕
562	愆	惶	惷	愀	惴	惺	愃	愡	惻	惱
563	愍	愎	慇	愾	愨	愧	慊	愿	愼	愬
564	愴	愽	慂	慄	慳	慷	慘	慙	慚	慫
565	慴	慯	慥	慱	慟	慝	慓	慵	憙	憖
566	憇	憬	憔	憚	憊	憑	憫	憮	懌	懊
567	應	懷	懈	懃	懆	憺	懋	罹	懍	懦
568	懣	懶	懺	懴	懿	懽	懼	懾	戀	戈
569	戉	戍	戌	戔	戛					
570		戞	戡	截	戮	戰	戲	戳	扁	扎
571	扞	扣	扛	扠	扨	扼	抂	抉	找	抒
572	抓	抖	拔	抃	抔	拗	拑	抻	拏	拿
573	拆	擔	拈	拜	拌	拊	拂	拇	抛	拉
574	挌	拮	拱	挧	挂	挈	拯	拵	捐	挾
575	捍	搜	捏	掖	掎	掀	掫	捶	掣	掏
576	掉	掟	掵	捫	捩	掾	揩	揀	揆	揣
577	揉	插	揶	揄	搖	搴	搆	搓	搦	搶
578	攝	搗	搨	搏	摧	摯	摶	摎	攪	撕
579	撓	撥	撩	撈	撼					
580		據	擒	擅	擇	撻	擘	擂	擱	擧
581	舉	擠	擡	抬	擣	擯	攬	擶	擴	擲
582	擺	攀	擽	攘	攜	攅	攤	攣	攫	攴
583	攵	攷	收	攸	畋	效	敖	敕	敍	敘
584	敞	敝	敲	數	斂	斃	變	斛	斟	斫
585	斷	旃	旆	旁	旄	旌	旒	旛	旙	无
586	旡	旱	杲	昊	昃	旻	杳	昵	昶	昴
587	昜	晏	晄	晉	晁	晞	晝	晤	晧	晨
588	晟	晢	晰	暃	暈	暎	暉	暄	暘	暝
589	曁	暹	曉	暾	暼					

1st to 3rd digit	4th digit figure of the JIS Kanji code									
	0	1	2	3	4	5	6	7	8	9
590		曄	暸	曖	曚	曠	昿	曦	曩	曰
591	曵	曷	朏	朖	朞	朦	朧	霸	朮	朿
592	朶	杁	朸	朷	杆	杞	杠	杙	杣	杤
593	枉	杰	枩	杼	杪	枌	枋	枦	枡	枅
594	枷	柯	枴	柬	枳	柩	枸	柤	柞	柝
595	柢	柮	枹	柎	柆	柧	檜	栞	框	栩
596	桀	桍	栲	桎	梳	栫	桙	档	桷	桿
597	梟	梏	梭	梔	條	梛	梃	檮	梹	桴
598	梵	梠	梺	椏	梍	桾	椁	棊	椈	棘
599	椢	椦	棡	椌	棍					
600		棔	棧	棕	椶	椒	椄	棗	棣	椥
601	棹	棠	棯	椨	椪	椚	椣	椡	棆	楹
602	楷	楜	楸	楫	楔	楾	楮	椹	楴	椽
603	楙	椰	楡	楞	楝	榁	楪	榲	榮	槐
604	榿	槁	槓	榾	槎	寨	槊	槝	榻	槃
605	榧	樮	榑	榠	榜	榕	榴	槞	槨	樂
606	樛	槿	權	槹	槲	槧	樅	榱	樞	槭
607	樔	槫	樊	樒	櫁	樣	樓	橄	樌	橲
608	樶	橸	橇	橢	橙	橦	橈	樸	樢	檐
609	檍	檠	檄	檢	檣					
610		檗	蘗	檻	櫃	櫂	檸	檳	檬	櫞
611	櫑	櫟	檪	櫚	櫪	櫻	欅	蘖	櫺	欒
612	欖	鬱	欟	欸	欷	盜	欹	飮	歇	歃
613	歉	歐	歙	歔	歛	歟	歡	歸	歹	歿
614	殀	殄	殃	殍	殘	殕	殞	殤	殪	殫
615	殯	殲	殱	殳	殷	殼	毆	毋	毓	毟
616	毬	毫	毳	毯	麾	氈	氓	气	氛	氤
617	氣	汞	汕	汢	汪	沂	沍	沚	沁	沛
618	汾	汨	汳	沒	沐	泄	泱	泓	沽	泗
619	泅	泝	沮	沱	沾					
620		沺	泛	泯	泙	泪	洟	衍	洶	洫
621	洽	洸	洙	洵	洳	洒	洌	浣	涓	浤
622	浚	浹	浙	涎	涕	濤	涅	淹	渕	渊
623	涵	淇	淦	涸	淆	淬	淞	淌	淨	淒
624	淅	淺	淙	淤	淕	淪	淮	渭	湮	渮
625	渙	湲	湟	渾	渣	湫	渫	湶	湍	渟
626	湃	渺	湎	渤	滿	渝	游	溂	溪	溘
627	滉	溷	滓	溽	溯	滄	溲	滔	滕	溏
628	溥	滂	溟	潁	漑	灌	滬	滸	滾	漿
629	滲	漱	滯	漲	滌					
630		漾	漓	滷	澆	潺	潸	澁	澀	潯
631	潛	濳	潭	澂	潼	潘	澎	澑	濂	潦
632	澳	澣	澡	澤	澹	濆	澪	濟	濕	濬
633	濔	濘	濱	濮	濛	瀉	瀋	濺	瀑	瀁
634	瀏	濾	瀛	瀚	潴	瀝	瀘	瀟	瀰	瀾
635	瀲	灑	灣	炙	炒	炯	烱	炬	炸	炳
636	炮	烟	烋	烝	烙	焉	烽	焜	焙	煥
637	煕	熈	煦	煢	煌	煖	煬	熏	燻	熄
638	熕	熨	熬	燗	熹	熾	燒	燉	燔	燎
639	燠	燬	燧	燵	燼					
640		燹	燿	爍	爐	爛	爨	爭	爬	爰
641	爲	爻	爼	爿	牀	牆	牋	牘	牴	牾
642	犂	犁	犇	犒	犖	犢	犧	犹	犲	狃
643	狆	狄	狎	狒	狢	狠	狡	狹	狷	倏
644	猗	猊	猜	猖	猝	猴	猯	猩	猥	猾
645	獎	獏	默	獗	獪	獨	獰	獸	獵	獻
646	獺	珈	玳	珎	玻	珀	珥	珮	珞	璢
647	琅	瑯	琥	珸	琲	琺	瑕	琿	瑟	瑙
648	瑁	瑜	瑩	瑰	瑣	瑪	瑶	瑾	璋	璞
649	璧	瓊	瓏	瓔	珱					
650		瓠	瓣	瓧	瓩	瓮	瓲	瓰	瓱	瓸
651	瓷	甄	甃	甅	甌	甎	甍	甕	甓	甞
652	甦	甬	甼	畄	畍	畊	畉	畛	畆	畚
653	畩	畤	畧	畫	畭	畸	當	疆	疇	畴
654	疊	疉	疂	疔	疚	疝	疥	疣	痂	疳
655	痃	疵	疽	疸	疼	疱	痍	痊	痒	痙
656	痣	痞	痾	痿	痼	瘁	痰	痺	痲	痳
657	瘋	瘍	瘉	瘟	瘧	瘠	瘡	瘢	瘤	瘴
658	瘰	瘻	癇	癈	癆	癜	癘	癡	癢	癨
659	癩	癪	癧	癬	癰					
660		癲	癶	癸	發	皀	皃	皈	皋	皎
661	皖	皓	皙	皚	皰	皴	皸	皹	皺	盂
662	盍	盖	盒	盞	盡	盥	盧	盪	蘯	盻
663	眈	眇	眄	眩	眤	眞	眥	眦	眛	眷
664	眸	睇	睚	睨	睫	睛	睥	睿	睾	睹
665	瞎	瞋	瞑	瞠	瞞	瞰	瞶	瞹	瞿	瞼
666	瞽	瞻	矇	矍	矗	矚	矜	矣	矮	矼

1st to 3rd digit	4th digit figure of the JIS Kanji code									
	0	1	2	3	4	5	6	7	8	9
667	砌	砒	礦	碣	碩	碪	碼	磅	磔	磧
668	磚	磧	磨	磬	磴	磯	磲	磴	磑	磔
669	磊	磴	磯	磲	磧	磨	磚	磔	磑	磴
670	磯	磧	磴	磔	磨	磚	磧	磴	磔	磨
671	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
672	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
673	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
674	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
675	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
676	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
677	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
678	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
679	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
680	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
681	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
682	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
683	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
684	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
685	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
686	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
687	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
688	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
689	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
690	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
691	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
692	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
693	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
694	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
695	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
696	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
697	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
698	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
699	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
700	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
701	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
702	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
703	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
704	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
705	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
706	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
707	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
708	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
709	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
710	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
711	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
712	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
713	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
714	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
715	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
716	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
717	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
718	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
719	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
720	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
721	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
722	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
723	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
724	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
725	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
726	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
727	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
728	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
729	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
730	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
731	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
732	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
733	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
734	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
735	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
736	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
737	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
738	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
739	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
740	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
741	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
742	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨
743	磚	磧	磨	磔	磴	磯	磲	磴	磔	磨

1st to 3rd digit	4th digit figure of the JIS Kanji code									
	0	1	2	3	4	5	6	7	8	9
744	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
745	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
746	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
747	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
748	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
749	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
750	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
751	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
752	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
753	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
754	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
755	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
756	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
757	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
758	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
759	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
760	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
761	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
762	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
763	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
764	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
765	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
766	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
767	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
768	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
769	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
770	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
771	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
772	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
773	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
774	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
775	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
776	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
777	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
778	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
779	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
780	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
781	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
782	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
783	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
784	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
785	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
786	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
787	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
788	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
789	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
790	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
791	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
792	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
793	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
794	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
795	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
796	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
797	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
798	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
799	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
800	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
801	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
802	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
803	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
804	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
805	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
806	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
807	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
808	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
809	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
810	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
811	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
812	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
813	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
814	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
815	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
816	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
817	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
818	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
819	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞
820	衞	衞	衞	衞	衞	衞	衞	衞	衞	衞

1st to 3rd digit	4th digit figure of the JIS Kanji code									
	0	1	2	3	4	5	6	7	8	9
821	鬨	鬩	鬪	鬮	鬯	鬲	魄	魃	魏	魍
822	魎	魑	魘	魴	鮓	鮑	鮖	鮗	鮟	鮠
823	鮨	鮴	鯀	鯊	鮹	鯆	鯏	鯑	鯒	鯣
824	鯢	鯤	鯔	鯡	鰺	鯲	鯱	鯰	鰹	鯵
825	鰻	鰐	鰒	鰔	鰈	鰕	鰹	鯛	鰤	鰭
826	鰲	鰾	鰈	鰉	鰊	鰌	鰔	鰉	鰍	鰏
827	鰐	鰒	鰕	鰹	鰲	鰥	鰤	鰈	鰔	鰙
828	鰈	鱇	鰂	鱠	鱸	鱈	鰻	鰾	鱚	鱠
829	鱧	鱶	鱸	鳶	鳶	鳶	鳶	鳶	鳶	鳶
830	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶
831	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶
832	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶
833	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶
834	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶
835	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶
836	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶
837	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶
838	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶
839	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶
840	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶	鳶

Note: The miniSD memory card is not included in the bundle and needs to be purchased. ☛P331

Combination of operations during Multiaccess

The following table shows whether or not a process that is generated or to be performed can be operated when any other operation is in progress:

○: Another communication is available.
△: Another communication is available depending on conditions.
×: Another communication is unavailable.

Processes that occur or are performed / Current status	Voice call		Videophone call		PushTalk		i-mode*1	Full Browser	i-mode Mail	
	Send	Receive	Send	Receive	Send	Receive	Connect	Connect	Send	Receive
During a voice call	△*1	△*1, 2	×	△*3	×	×*4	○	○	○	○*5
During a videophone call	×	△*3	×	△*3	×	×	×	×	×	×
During a PushTalk call	×	△*6	×	×*4	×	×*4	×	×	×	×
During i-mode	○	○	○*7	△*8	○*7	△*9	×	○*7	○	○
Connecting to Full Browser	○	○	○*10	△*8	○*10	△*9	×	×	○*10	○
During i-mode Mail reception/ transmission	○	○	○*7	△*8	○*7	△*9	○	○*11	○*12	○*12
During SMS reception/ transmission	○	○	○	○	○	○	○	○	○*12	○*12
During i-αppli operation	○*13	○*13	○*13	○*13	○*14	△*15	×	×	○	○*5
miniSD memory card in operation (other than copy or format processing)	○	○	○	○	○	○	×	×	○	○
During packet communication connecting to PC	○	○	×	×*4	×	×	×	×	×	×
During 64K data communication	×	△*2, 16	×	△*3	×	×	×	×	×	×
During connecting to the Data Center	○*17	○	○*18	△*8	○*18	△*9	×	×	×	×

Processes that occur or are performed / Current status	SMS		Packet communication		64K data communication		Data transmission (infrared communication)	
	Send	Receive	Send	Receive	Send	Receive	Send	Receive
During a voice call	○	○*5	○	○	×	△*3	×	×
During a videophone call	×	○*5	×	×	×	△*3	×	×
During a PushTalk call	×	○*5	×	×	×	×	×	×
During i-mode	○	○	×	×	×	×*4	×	×
Connecting to Full Browser	○	○	×	×	×	×*4	×	×
During i-mode Mail reception/ transmission	○*12	○*12	×	×	×	×*4	×	×
During SMS reception/ transmission	○*12	○*12	○	○	○*19	○	×	×
During i-αppli operation	○	○*5	○	○	○	○	○	×
miniSD memory card in operation (other than copy or format processing)	○	○	○	○	○	○	○	×
During packet communication connecting to PC	○*20	○	×	×	×	×*4	×	×
During 64K data communication	×	○*5	×	×	×	△*3	×	×
During connecting to the Data Center	×	×	×	×	×	×*4	×	×

- During the data copy or format processing for the miniSD memory card, infrared communication, data transmission via USB connection or miniSD mode, any communication is unavailable.
- In case a videophone call is made connecting with the external device, it is the operation during 64K data communication.
- During i-mode (i-mode connection) includes i-channel communication (except receiving information).
- Receiving i-mode mail includes receiving Message R/F and receiving the information of i-channel.

*1 In case Call Waiting Service is active, you can make a call to another party or receive from another party during a call.
*2 Subscribers to Voice Mail Service and Call Forwarding Service can also use these services.
*3 In case Call Waiting Service or Call Forwarding Service is active, the call is recorded as missed call in the received call history. In addition, when ***Set arrival act*** is activated, the call is recorded as missed call in the received call history even if Call Waiting Service or Call Forwarding Service is deactivated.
*4 The call is recorded as missed call in the received call history.
*5 The ring alert does not sound.
*6 Depends on the setting of PushTalk Arrival Act.
*7 i-mode communication is disconnected if active.
*8 Depends on the setting of Data Session Arrival Act.
*9 Depends on the setting of i-mode Arrival Act: PT.
*10 In case of connecting to Full Browser, Full Browser connection is disconnected.
*11 Connecting is available after finishing sending/receiving i-mode Mail.
*12 Sending while sending or receiving while receiving cannot be performed. Sending and receiving may not be allowed at the same time.
*13 Melody of i-αppli is stopped. When i-αppli is using i-mode communication, i-mode communication is disconnected.
*14 When i-αppli is using i-mode communication, i-mode communication is disconnected.
*15 Depends on the setting of i-mode Arrival Act: PT when i-αppli is using i-mode communication.
*16 In case Call Waiting Service is active, you can select answering a call after finishing the current communication or rejecting the incoming call.
*17 In case of connecting to the Data Center, dialing via the flat type earphone/microphone set with switch (optional) is not available.
*18 Communication to the Data Center is disconnected if active.
*19 Sending may not be available during sending SMS.
*20 You can compose and send SMS from the phonebook.

 Note: The miniSD memory card is not included in the bundle and needs to be purchased. ☛P331

Combination of functions during Multitask

Whether or not selections made in the ***New Task*** menu can be combined with the currently run or set function is described in the following table:

○ : can be selected　× : cannot be selected

New Task menu item / Function in progress	Dial	1 Mail												2 i-mode					
		1 Inbox	2 Compose message	3 Chat Mail	4 Unsent messages	5 Outbox	6 Check new message			7 SMS			8 Read templates	1 iMenu	2 Bookmark	3 Go to location			4 Screen Memo
							1 i-mode message	2 SMS	3 Receive option	1 Compose SMS	2 Received SMS	3 Sent SMS				1 Enter URL	2 URL history	3 Last visited URL	
Phone call	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Dial input	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Videophone call	×	○	×	×	○	○	×	×	×	×	○	○	×	×	×	×	×	×	×
PushTalk	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×
64K data comm.	×	○	○	○	○	○	×	○	×	○	○	○	○	×	×	×	×	×	○
PPP data comm.	○	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×
Outbox/Inbox/Unsent messages	○	×	○	×	×	×	○	○	○	○	×	×	×	○	○	○	○	○	○
Compose i-mode Mail/SMS	○	○	×	×	○	○	○	○	○	×	○	○	○	○	○	○	○	○	○
Chat mail	○	×	×	×	×	×	×	×	×	×	×	×	×	○	○	○	○	○	○
Read mail templates	○	×	○	×	×	×	○	○	○	○	×	×	×	○	○	○	○	○	○
Received/Sent SMS (UIM)	○	×	○	×	×	×	○	○	○	○	×	×	×	○	○	○	○	○	○
Message R/F list screen	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Message R/F view screen	○	○	○	○	○	○	○	○	×	○	○	○	○	×	×	×	×	×	×
Check i-mode Message	○	○	○	×	○	○	×	×	○	○	○	○	○	○	○	○	○	○	○
Check SMS	○	○	○	○	○	○	×	×	×	○	○	○	○	○	○	○	○	○	○
iMenu	○	○	○	○	○	○	○	○	×	○	○	○	○	×	×	×	×	×	×
Full Browser	○	○	○	○	○	○	○	○	×	○	○	○	○	×	×	×	×	×	×
Enter URL/URL history/Bookmark/Last Visited URL	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	×	×	×
Screen Memo list screen	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	×	×	×
Screen Memo display screen	○	○	○	○	○	○	○	○	×	○	○	○	○	×	×	×	×	×	×
i-Channel	○	○	○	○	○	○	○	○	×	○	○	○	○	×	×	×	×	×	×
i-αppli/Software list	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	×	×	×
i-αppli download	○	○	○	○	○	○	○	○	×	○	○	○	○	×	×	×	×	×	×
i-motion (Play video/music)	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Melody	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Image (My Picture)	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Chara-den	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
My Document	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Camera	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Movie Camera/Sound Recorder	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Bar Code Reader	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
ToruCa	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Music Player	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Phonebook/PushTalk phonebook	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
PushTalkPlus	○	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×
Notepad	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Scheduler	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Calculator	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Dictionaries	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Received Calls/Redial	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Own Number	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Receiving i-mode Mail	○	○	○	×	○	○	×	×	○	○	○	○	○	○	○	○	○	○	○
Receiving SMS	○	○	○	×	○	○	×	×	×	○	○	○	○	○	○	○	○	○	○
Answer Machine/Voice Memo	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Alarm clock/Schedule alarm	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Timer	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
miniSD memory card	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	×	×	×
Videophone call by external device	×	○	○	○	○	○	×	○	×	○	○	○	○	×	×	×	×	×	○
Connecting to the Data Center	○	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×
Display communication log in Phonebook	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

○ : can be selected　× : cannot be selected

New Task menu item / Function in progress	2 i-mode									3 i-αppli	4 Phonebook & Logs							
	5 Message retrieval	6 Message R&F		7 i-Channel list	8 Full Browser						1 Phonebook	2 PushTalk phonebook	3 Received calls	4 Redial	5 Ans. machine/ V. memo			6 Own number
		1 Message R	2 Message F		1 Home	2 Bookmark	3 Enter URL	4 URL history	5 Last visited URL						1 Recorded messages	2 Record voice memo	3 Voice memos	
Phone call	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	○	○
Dial input	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Videophone call	×	○	○	×	×	×	×	×	×	×	○	○	×	×	×	×	×	○
PushTalk	×	×	×	×	×	×	×	×	×	×	○	○	○	○	×	×	×	○
64K data comm.	×	○	○	×	×	×	×	×	×	○	○	○	○	○	○	×	○	○
PPP data comm.	×	×	×	×	×	×	×	×	×	○	○	○	○	○	○	○	○	○
Outbox/Inbox/Unsent messages	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Compose i-mode Mail/SMS	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Chat mail	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Read mail templates	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Received/Sent SMS (UIM)	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Message R/F list screen	○	×	×	○	○	○	○	○	○	×	○	○	○	○	○	○	○	○
Message R/F view screen	○	×	×	×	×	×	×	×	×	×	○	○	○	○	○	○	○	○
Check i-mode Message	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Check SMS	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
iMenu	○	×	×	×	×	×	×	×	×	×	○	○	○	○	○	○	○	○
Full Browser	○	×	×	×	×	×	×	×	×	×	○	○	○	○	○	○	○	○
Enter URL/URL history/Bookmark/Last Visited URL	○	○	○	×	×	×	×	×	×	×	○	○	○	○	○	○	○	○
Screen Memo list screen	○	○	○	×	×	×	×	×	×	×	○	○	○	○	○	○	○	○
Screen Memo display screen	○	×	×	×	×	×	×	×	×	×	○	○	○	○	○	○	○	○
i-Channel	○	×	×	×	×	×	×	×	×	×	○	○	○	○	○	○	○	○
i-αppli/Software list	○	×	×	×	×	×	×	×	×	×	○	○	○	○	○	○	○	○
i-αppli download	○	×	×	×	×	×	×	×	×	×	○	○	○	○	○	○	○	○
i-motion (Play video/music)	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Melody	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Image (My Picture)	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Chara-den	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
My Document	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Camera	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Movie Camera/Sound Recorder	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	○
Bar Code Reader	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
ToruCa	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Music Player	○	○	○	○	○	○	○	○	○	×	○	○	○	○	×	×	×	○
Phonebook/PushTalk phonebook	○	○	○	○	○	○	○	○	○	○	×	×	○	○	○	○	○	○
PushTalkPlus	×	×	×	×	×	×	×	×	×	×	○	○	○	○	×	×	×	○
Notepad	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Scheduler	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Calculator	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Dictionaries	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Received Calls/Redial	○	○	○	○	○	○	○	○	○	○	○	○	×	×	○	○	○	○
Own Number	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×
Receiving i-mode Mail	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Receiving SMS	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Answer Machine/Voice Memo	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	○
Alarm clock/Schedule alarm	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Timer	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
miniSD memory card	×	×	×	×	×	×	×	×	×	×	○	○	○	○	×	×	×	○
Videophone call by external device	×	○	○	×	×	×	×	×	×	○	○	○	○	○	○	×	○	○
Connecting to the Data Center	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×
Display communication log in Phonebook	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Note: The miniSD memory card is not included in the bundle and needs to be purchased. ☛P331

○ : can be selected　× : cannot be selected

Function in progress \ *New Task* menu item	5 Data Box					6 LifeKit					7 Stationery				8 Adjust volume			9	#
	1 Image	2 i-motion	3 Melody	4 Chara-den	5 My Documents	1 Bar code reader	2 ToruCa	3 Camera	4 Movie Camera	5 Sound recorder	1 Scheduler	2 Notepad	3 Calculator	4 Dictionaries	1 Call alert volume	2 Mail/Msg alert vol.	3 i-αpli effect sound	Music player	Silent mode ON/OFF
Phone call	○	○	○	○	○	○	○	○	×	×	○	○	○	○	×	○	○	×	×
Dial input	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	○
Videophone call	×	×	×	×	×	×	×	×	×	×	○	○	×	○	×	○	○	×	×
PushTalk	×	×	×	×	×	×	×	×	×	×	○	○	○	○	×	○	○	×	×
64K data comm.	○	○	○	○	○	○	○	○	×	×	○	○	○	○	×	○	○	×	○
PPP data comm.	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	○
Outbox/Inbox/Unsent messages	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Compose i-mode Mail/SMS	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Chat mail	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Read mail templates	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Received/Sent SMS (UIM)	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Message R/F list screen	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Message R/F view screen	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Check i-mode Message	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Check SMS	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
iMenu	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Full Browser	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Enter URL/URL history/Bookmark/Last Visited URL	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Screen Memo list screen	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Screen Memo display screen	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
i-Channel	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
i-αpli/Software list	×	×	×	×	×	○	○	○	○	○	○	○	○	○	○	○	○	×	○
i-αpli download	×	×	×	×	×	○	○	○	○	○	○	○	○	○	○	○	○	×	○
i-motion (Play video/music)	○	×	○	×	○	×	○	×	×	×	○	○	○	○	○	○	○	×	○
Melody	○	○	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	○
Image (My Picture)	×	○	○	×	○	×	○	×	×	×	○	○	○	○	○	○	○	○	○
Chara-den	×	×	○	×	○	×	○	×	×	×	○	○	○	○	○	○	○	×	○
My Document	○	○	○	○	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Camera	×	×	○	×	○	×	○	×	×	×	○	○	○	○	○	○	○	×	○
Movie Camera/Sound Recorder	×	×	○	×	○	×	○	×	×	×	○	○	○	○	○	○	○	×	○
Bar Code Reader	×	×	○	×	○	×	○	×	×	×	○	○	○	○	○	○	○	×	○
ToruCa	○	○	○	○	○	○	×	○	○	○	○	○	○	○	○	○	○	×	○
Music Player	○	×	×	×	○	×	×	×	×	×	○	○	○	○	○	○	○	×	×
Phonebook/PushTalk phonebook	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
PushTalkPlus	×	×	×	×	×	×	×	×	×	×	○	○	○	○	○	○	○	○	×
Notepad	○	○	○	○	○	○	○	○	○	○	○	×	○	○	○	○	○	○	○
Scheduler	○	○	○	○	○	○	○	○	○	○	×	○	○	○	○	○	○	○	○
Calculator	○	○	○	○	○	○	○	○	○	○	○	○	×	○	○	○	○	○	○
Dictionaries	○	○	○	○	○	○	○	○	○	○	○	○	○	×	○	○	○	○	○
Received Calls/Redial	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Own Number	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Receiving i-mode Mail	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Receiving SMS	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Answer Machine/Voice Memo	○	○	○	○	○	○	○	○	×	×	○	○	○	○	○	○	○	×	○
Alarm clock/Schedule alarm	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	○
Timer	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
miniSD memory card	×	×	×	×	×	○	○	○	○	○	○	○	○	○	○	○	○	×	○
Videophone call by external device	○	○	○	○	○	○	○	○	×	×	○	○	○	○	×	○	○	×	○
Connecting to the Data Center	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×
Display communication log in Phonebook	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

• Some functions which can be selected may be unavailable depending on the status of activating or lock settings, etc.

Services available for FOMA terminal

Service	Phone number
Collect call (calls charged to receiver)	106 (no area code)
Directory assistance for general subscriber phones and for DoCoMo's mobile phones (charges apply) (unlisted phone numbers cannot be given)	104 (no area code)
Telegrams (charges apply) 8 a.m. to 10 p.m.	115 (no area code)
Time (charges apply)	117 (no area code)
Weather (charges apply)	Area code + 177
Police emergencies	110 (no area code)
Fire and ambulance	119 (no area code)
Marine emergencies and accident reports	118 (no area code)
Disaster Voice Mail Service (charges apply)	171 (no area code)

INFORMATION

- If you use the collect call service (106), the call charge is billed to the receiver together with a commission of 90 yen (94.5 yen with tax included) per call. (as of May 2006)
- If you use the directory assistance service (104), a service charge of 100 yen (105 yen with tax included) is billed together with the call charge. Note that this service is available free from charge for those who are under special conditions. For further information, inquire at 116 (NTT sales center) from a general subscriber phone. (as of May 2006)
- Note that calls to 110, 119 or 118 from FOMA terminal cannot be located. Since the police or fire department authorities may call you to confirm, inform them that you are calling from a mobile phone, give your number and detailed information of your whereabouts. To make sure that you are not cut off during the call, stay in one place when you make the call and do not turn off the phone after the call, but keep it on for about 10 minutes.
- Depending on the area you are calling from, you may not be connected to the local police or fire department. Use a public payphone or general subscriber phone if you cannot get in touch with the local authorities.
- A general subscriber phone, when it is set for "Call Forwarding", can forward an incoming call to a mobile phone. In this case, even when the receiver's side is busy, is outside the service area, or is turned off, the caller may still hear ringing alert. It is due to some optional setting applied to the caller's or receiver's side.
- You may not be able to call 116 (NTT sales center), Dial Q^2, Message Dial and make credit card calls. However, credit card calls can be made from a general subscriber phone/pay phone to FOMA terminal.

Options and related devices

Combining FOMA terminal with optional accessories supports a wide variety uses from personal use to business use. Some products are unavailable depending on the region. For details, contact DoCoMo Shops.
For details about the optional accessories, refer to the instruction manual for each device.

- Battery pack D06
- Rear cover D11
- Desktop holder D09
- FOMA AC adapter 01
- FOMA domestic/overseas AC adapter 01
- FOMA DC adapter 01
- FOMA battery adapter 01
- Flat type earphone/microphone set with switch P01/P02
- Flat type stereo earphone set P01
- Earphone jack converter adapter P001
- Earphone/microphone set with switch P001*1/P002*1
- Stereo earphone set P001*1
- Earphone terminal P001*1
- FOMA USB cable
- Data communication adapter D01
- FOMA indoor auxiliary antenna
- In-Car Hands-Free Kit 01*2
- FOMA In-Car Hands-Free Cable 01
- In-car holder 01
- Carrying case L 01

*1 The earphone jack converter adapter P001 is required.
*2 FOMA In-Car Hands-Free Cable 01 is required to connect to FOMA D902iS.

About the data link software

The FOMA D Series Data Link Software can be used to transfer data such as Bookmark between your FOMA terminal and a connected PC. You can install the FOMA D Series Data Link Software from the attached CD-ROM or download it from the following websites:
http://www.MitsubishiElectric.co.jp/d902is/

 Note: The miniSD memory card is not included in the bundle and needs to be purchased. ☛P331

● For details on the installation of data link software, see “README_DL” file (text format) of “DataLink” folder in the attached CD-ROM.
● For details on how to download, transferable data, operating procedure and operation environment, access the website above or refer to the data link software Help menu.

- The FOMA USB cable (optional) is required for connecting to PC.
- Copyright laws forbid transfer of downloaded information from FOMA terminal to external sources even in its use of the data link software. Also, you cannot forward the data if it is prohibited from being output from FOMA terminal.

Supported OS

Windows 98SE, Me, 2000, XP

- A PC/AT compatible machine for the above OS is required.

When using the data link software

- Copyright laws
  Although this software is distributed as freeware, note that the copyright belongs to Mitsubishi Electric Corporation.
- Liability
  Mitsubishi Electric Corporation assumes no legal responsibility for defect liability, including software issues and false operations and other responsibility. Additionally, Mitsubishi Electric Corporation makes no guarantees whatsoever as to the merchantability of the software and conformance to specific purposes of customers.

Contact information for technical matters concerning the data link software

Mitsubishi Electric Data Link Support Center:
03-5319-5720
Business hours: weekdays 9:00 to 12:00/13:00 to 17:00 (closed on Saturdays, Sundays, national holidays, new year’s holidays and company holidays)

- To avoid mistakes, please double-check the number before dialing.

Playing video data downloaded from the external devices on FOMA terminal

You can play video files created with external devices such as a PC on FOMA terminals by converting into the playable format and storing in the miniSD memory cards.

Converting the file format via Motion Smoothy 2

You can convert video files on PC to the playable format on FOMA terminal by using Motion Smoothy 2 contained in the attached CD-ROM, which is the software for converting the video on PC.
The compatible video file format is as follows:

Item	Compatible video file format
Before converting*1	AVI, MOV, WMV, MPEG1, MPEG2
After converting	MP4（Image size: 320 x 240 dots）

*1 Some files cannot be converted depending on the PC environment.

- For the operation method of Motion Smoothy 2, please refer to “FOMA D902iS Motion Smoothy 2簡易操作ガイド”(Simple User’s Manual for Motion Smoothy 2 of FOMA D902iS) and HELP of Motion Smoothy 2.
- To play the converted video files on FOMA terminal, it is required to transfer video files saved in PC to the miniSD memory card. The miniSD memory card inserted to FOMA terminal can be used on PC by using the FOMA USB cable (optional). ☛P342
- How to play video files saved in the miniSD memory card ☛P338

■ Operating environment of Motion Smoothy 2

Item	Operating environment
PC	PC/AT compatible computer equipped with the processor with Intel Pentium III 800MHz or more
OS	Windows 2000 (DirectX8.1 or later), XP
Memory	256 MB or more
Hard disk	256 MB or more free disk space

Item	Operating environment
Required software	Windows Media Player 7.1 or later (Requisite) Quick Time Player 6.1 or later (Recommended)*1 Playing software for MPEG2 such as DVD player (Recommended)*2
Display	Resolution is 1024 x 768 dots or more and having ability to display in True color or full color.
Other	Sound card is equipped and sound can be played.

*1 Required when converting the file of MOV format.
*2 Required when converting the file of MPEG2 format.

■ **Installing Motion Smoothy 2**

When setting up the attached CD-ROM in PC, the setup screen for the software appears. Click ***Motion Smoothy 2***. Follow the procedures according to the instructions of the screen.

- The serial number to enter when installing is indicated on the seal attached on the CD-ROM.

■ **Contact information for Motion Smoothy 2**

Mitsubishi Electric Data Link Support Center
03-5319-5720
Office hours: weekdays 9:00 to 12:00 /13:00 to 17:00 (closed on Saturdays, Sundays, national holidays, new year's holidays and company holidays)

- To avoid mistakes, please double-check the number before dialing.

INFORMATION

● In case video files saved in the miniSD memory card are not played, update the information of the miniSD memory card. ☛P341

● The detailed information of operating environment, installation and the usage of Motion Smoothy 2 are described in "README_MS2" file (text format) within "MotionSmoothy" folder in the attached CD-ROM. Please confirm it before using Motion Smoothy 2.

Playing video data recorded with FOMA terminal on a PC

You can play videos (MP4 files) recorded with FOMA terminals on PCs by storing in the miniSD memory cards, sending by attaching to mail, etc.

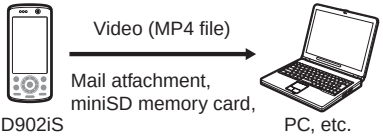

- Video files supported by FOMA terminals ☛P174

About Video playing software

Playing videos (MP4 file) on a PC requires QuickTime Player (free of charge) ver. 6.4 or later (or ver. 6.3 + 3GPP), which is provided by Apple Computer Inc.
QuickTime Player can be downloaded from the website below:
http://www.apple.com/jp/quicktime/download/

- Downloading the software requires a PC with Internet access. Communication charges are separately required for downloading.
- For details including the operating environment, downloading procedure and operation instructions, visit the website shown above.

Troubleshooting

Check if updating software is required first and perform Software Update if necessary. ☛P457

Power supply and charging

● FOMA terminal cannot be turned on (the terminal cannot be used).

- Is the battery pack connected properly? ☛P41
- Is the battery depleted? ☛P45
- When the mova terminal is on when using Dual Network Service, the FOMA terminal service is not available. Check whether or not FOMA terminal is on. For details, see "Network Services User's Guide".

● The icon on the top of the display flashes and a rapid beep alarm is heard.

The battery is almost discharged. Charge the battery. ☛P42

● FOMA terminal cannot be charged.

- Is the battery pack connected properly? ☛P41
- Is the charger terminal dirty? Clean the terminal with dry cotton swab, etc.
- Is the AC adapter (optional) connector securely inserted to the FOMA terminal's jack or the desktop holder (optional) connection terminal? ☛P43
- Is FOMA terminal correctly mounted on the desktop holder (optional)? ☛P44

 Note: The miniSD memory card is not included in the bundle and needs to be purchased. ☛P331

● The Enter key flashes in red during charging.

End any calls or communications immediately.
Disconnect the optional AC adapter (Desktop holder) or DC adapter from FOMA terminal. Then connect all the devices correctly and start over. ☛P42, P43
If the problem still persists, contact "Repairs" listed on the back of this manual.

Phone

● "Please wait for a while" is displayed and does not go out.



- The voice line/Packet communication equipment is damaged or the voice line network/Packet communication network is so congested. Please retry later. The message can be deleted by pressing a dial key.
- You can call the number 110,119 and 118. However the call may not be connected depending on the status.

● Calls cannot be made using the dial keys.

- Have you set All Lock? ☛P158
- Have you set Keypad Dial Lock? ☛P161
- Have you set Self Mode? ☛P160
- Have you set Omakase Lock (Remote Lock)? ☛P159

● 圏外 (outside service area) is indicated on the display and you hear busy signals.

Are you outside the service area or in an area with poor signal strength? ☛P45

● After dialing a number, you hear busy signals and cannot establish your call.

- Have you dialed the area code? ☛P50
- Did you hear the dial tone before entering a phone number?
- Is 圏外 indicated? ☛P45

● The ring alert does not sound.

- Is the ring alert volume set to ***silent***? ☛P68
- Is the following function set?
  - ・Reject/Accept Call ☛P165
  - ・Anonymous Caller ☛P166
  - ・Mute Ring Time Setting ☛P167
  - ・Reject non-Reg. Caller ☛P168
- Have you set Silent Mode? ☛P135
- Have you set Public mode (Driving mode)? ☛P73
- Have you set All Lock? ☛P158
- Have you set Self Mode? ☛P160
- Is the ringing time for Voice Mail Service or Call Forwarding Service set to ***0 sec***? ☛P392, P394

● An incoming voice call cannot be responded with the Any Key Answer function.

Is Any Key Answer set to ***OFF***? ☛P65

● During a voice call, the other party's voice is hard to listen or too loud.

Has the earpiece volume setting been changed? Adjust it appropriately. ☛P68

● The redial data/received call history is erased unexpectedly.

- Is Keypad Dial Lock set on? ☛P161
- Is PIM Lock set on? ☛P160

● When there is an incoming call, a name recorded in the phonebook is not displayed or the ring alert registered in the phonebook is not generated.

- Is the phone number notified by the other party? ☛P63
- Does the phone number of the other party match the phone number registered in the phonebook?
- Is more than one phone number registered in the same FOMA terminal phonebook or is the same phone number registered in the FOMA terminal phonebook and the UIM phonebook? ☛P107
- Is Privacy Mode activated? ☛P162

● When there is an incoming call, a ring alert not set sounds.

- The ring alert set in multiple functions sounds depending on the priority levels given below:
  ①Incoming settings of Multi Number
  ②Alert by Contact of the FOMA terminal phonebook
  ③Alert/Image by Group of the FOMA terminal phonebook
  ④Sound Setting
- Is Privacy Mode activated? ☛P162

● When there is an incoming call, an image not set appears.

- When video/i-motion containing sound and image is set as ring alert for Call Alert, the set video/i-motion is used as the image.
- When call images are set in multiple functions, the image appears depending on the priority levels given below. For details ☛P143
  ①Incoming settings of Multi Number
  ②The setting of the FOMA terminal phonebook Alert by Contact of the FOMA terminal phonebook
  ③Alert/Image by Group of the FOMA terminal phonebook
  ④Mail/Call Image (Call Alert/Videophone Alert) or Sound Setting
- Is Privacy Mode activated? ☛P162

● When there is an incoming call, the Enter key lights/flashes in a lighting pattern and lighting color not set.

- If a lighting pattern or lighting color is set for multiple functions, the Enter key lights/flashes depending on the priority levels given below:
  ①Alert by Contact of the FOMA terminal phonebook
  ②Alert/Image by Group of the FOMA terminal phonebook
  ③Light Alert Setting
- Is Privacy Mode activated? ☛P162

Settings and operations

● Key icon is displayed instead of menu icon and icon cannot be selected.

In case some functions cannot be activated because of various lock functions or the UIM not inserted, their icons change to 🔒 and cannot be selected.

● The keypad sound is not generated.

- Is Keypad Sound set to ***OFF***? ☛P130
- Have you activated Silent Mode? ☛P135

● A message ***Insert UIM.*** is displayed when FOMA terminal is powered on.

The UIM may not be properly attached or may be damaged. Check to see if the UIM is properly attached. ☛P38

● ***All locked.*** appears on the display.

All Lock is set. Cancel All Lock. ☛P158

● Omakase Lock active. is displayed and cannot operate the terminal.

Omakase Lock (Remote Lock) is set. ☛P159

● Nothing is indicated on the display.

- Is ***Normal use*** of ***Display light time*** in Display Light Setting set to other than ***Always***? Screen display disappears after about 90 seconds have elapsed without any operation. ☛P144
  Display reappears by any key operation.
- Have you set Key Lock? Display on the screen disappears while Key Lock is on. ☛P164

● Pressing keys has no effect.

The keys cannot be used because Key Lock is set. Cancel Key Lock. ☛P164

● The day of the week appears in Japanese.

- Is Select Language set to *日本語* (Japanese)? ☛P46
- Is the day for Clock Display Format set to ***Japanese***? ☛P151

● The display is dim.

Is ***Brightness*** in Display Light Setting set to ***Low***? ☛P144

● The lighting for the display and dial keys does not go on.

Is ***Normal use*** of ***Display light time*** in Display Light Setting set to ***0 sec***? ☛P144

● When Auto Power ON is set, FOMA terminal cannot be turned on at the specified time.

If the power is turned off in a manner other than the power-off operation or Auto Power OFF function (battery pack came off, for example), this function is not activated.

● Even if Alarm Clock or the schedule is set, the alarm does not operate at the specified date and time when the power is turned off.

- If the power is turned off in a manner other than the power-off operation or Auto Power OFF function (battery pack came off, for example), this function is not activated.
- Set Alarm Auto Power ON to ***ON***. ☛P369

● Call cost has not been charged.

The total cost for the UIM may exceed the limit (approx.16,770,000 yen).
You can reset to 0 yen. ☛P382

Mail and data

● Still images and video taken with the camera are blurred.

- When shooting an object nearby, use macro mode and switch to normal mode when shooting an object at a distance. ☛P186
- Shoot with the shake reduction set to ***Auto*** ☛P189

● Downloaded data, file attached to mail, or Message R/F cannot be displayed or played.

Because of the UIM operation restriction function, these functions are not available when the UIM is replaced or no UIM is inserted. ☛P39

● Names are not displayed or ring alert does not sound at the time of mail reception even though they have been registered in the phonebook.

- Does the mail address or number of the other party match that registered in the phonebook?
  Register correct phone numbers and mail address in the phonebook. ☛P107
- Is more than one mail addresses or phone number registered in the same FOMA terminal phonebook, or is the same mail address or the phone number registered in the FOMA terminal phonebook and the UIM phonebook? ☛P107
- Is Privacy Mode activated? ☛P162

● Mail reception is announced by other ring alert than that set for incoming mail.

- When the mail ring alert is set for multiple functions, the ring alert sounds depending on the priority levels given below:
  ① Alert by Contact of the FOMA terminal phonebook
  ② Alert/Image by Group of the FOMA terminal phonebook
  ③ Sound Setting
- When multiple mails are received at the same time, the mail ring alert sounds depending on the conditions set for the last mail received.
- Is Privacy Mode activated? ☛P162

● When mail is received, the Enter key lights/flashes in other lighting pattern and lighting color than those set for incoming mail.

- When the incoming mail lighting pattern and color are set for multiple functions, the Enter key lights/flashes depending on the priority levels given below:
  ① Alert by Contact of the FOMA terminal phonebook
  ② Alert/Image by Group of the FOMA terminal phonebook
  ③ Light Alert Setting
- When multiple mails are received at the same time, the Enter key lights or flashes in the incoming mail lighting pattern and color corresponding to the last mail received.
- Is Privacy Mode activated? ☛P162

 Note: The miniSD memory card is not included in the bundle and needs to be purchased. ☛P331

● The image and video is displayed as and .

If the data has been destroyed, it cannot be correctly displayed and or appears.

● The screen reacts slowly when a key is pressed.

While transferring large-size data between FOMA terminal and miniSD memory card, reactions on the FOMA terminal screen may have a delay.

Other

● Function of IC card is disabled.

- Have you IC Card Lock set to ***ON***? Or is IC Card Lock set to ***ON*** automatically by Timed Lock? ☛P300, P301
- If the battery pack is not connected properly or removed, the function of IC card is disabled because IC Card Lock is set. Check if the battery pack is connected properly and turn power off and then back on. ☛P41

Example of Error messages

Main error messages displayed on FOMA terminal are shown in the alphabetical order as follows:

- The "(number)" or "XXX" in error messages is a code used to distinguish the error sent from the i-mode Center.

● Address is not valid. (451)

Failed to transmit the i-mode Mail or SMS messages. Make sure if the address is correct.

● Authentication interrupted.

Displayed when you stop authentication on the screen.

● Authentication type is not supported. (401)

The authentication type is not supported and connection to the specified i-mode or internet web site is disabled.

● Cannot execute because of other tasks.

- Stop all other functions running before executing.
- Cannot be executed because the pattern definition is being updated. Execute after completing updating.

● Can not open any more window.

Cannot open a new window because the number of windows or frames is too many. It may be displayed when closing the open windows.

● Cannot save to a miniSD card. Saving to phone memory.

The still image/video with recorded Chara-den downloaded for which Rec. File Restriction has already been set to ***File restricted*** cannot be saved to a miniSD memory card. The ***Rec. File Restriction*** setting cannot be changed.

● Certificate is rejected.(tampered)

The site certificate is altered. Connection is suspended.

● Chat mail data damaged. Restore default settings?

The data of chat mail contains error. Select ***Yes*** to return to the default setting. Select ***No*** to quit chat mail without returning to the default setting.

● Check address.

Failed to transmit SMS. Make sure if the address is correct.

● Check address.

The mail address in the mail group contains error or no mail address is entered.
Check the mail address.

● Check SMS center setting.

SMS setting at ***SMSC*** is incorrect. Check the setting. ☛P266

● Connection failed.

Failed to connect to the i-mode Center. Please move to another location with good radio reception and retry.

● Connection failed. (403)

Failed to connect due to some cause such as connection to the specified i-mode or Internet web site was rejected.

● Connection failed. (503)

Failed to connect because of the maintenance of the server or congestion of the line.
Please retry after a while.

● Connection failed. (562)

Failed to connect to the i-mode Center. Please move to another location with good radio reception and retry.

● Connection interrupted.

Please move to another location with good radio reception and retry. If the error persists, try again later.

● Contains bad data.

i-αppli cannot be started from invalid data read with Bar Code Reader.

● Continue using i-αppli and transmit data?

The number of transmission is extremely large within the specified duration when using i-αppli and i-αppli tried to transmit again after the message ***Data transmission is frequent. Continue transmission?*** was displayed. Select ***Yes*** to use i-αppli successively, ***Terminate i-αppli*** to quit i-αppli.

● Data damaged. Restore default settings?

The data of the mail or ToruCa contains error. Select ***Yes*** to return to the default setting. Mail or ToruCa cannot be started without restoring the default setting.

● Data error. Unable to download.

The data of ToruCa (details) is invalid.

● Data in IC card is full. Unable to download. Delete some software?

New Osaifu-Keitai compatible i-αppli cannot be downloaded if Osaifu-Keitai compatible i-αppli registered already is deleted because the data in IC card is full. Select ***Yes*** and the i-αppli list to be deleted appears.Delete i-αppli software registered already until free disk space required for IC card is secured.

- In case the message ***IC card software full. Delete software.*** appears on the list, select i-αppli to be deleted. When highlighting i-αppli, in case ***Start*** is shown in the upper right part of the guide row, select after activating i-αppli by pressing (m) and delete the data in IC card.
- In case the message ***xxxx byte need to delete.*** appears on the list, the data size used in IC card is shown for i-αppli respectively. Highlight i-αppli to be deleted and press (m) to activate i-αppli and delete the data in IC card. After that, select i-αppli and delete it.

● Data or miniSD card damaged.

The miniSD memory card cannot be accessed because it has a problem. Initialize the miniSD memory card or insert a new miniSD memory card. ☛P341, P335

● Data transmission is frequent. Continue transmission?

Displayed in case the number of transmission is extremely large within the specified duration when using i-αppli. Select ***Yes*** to use i-αppli successively, ***No*** to continue i-αppli after terminating i-αppli transmission or ***Terminate i-αppli*** to quit i-αppli.

● Date and time not set. Unable to start.

Activating i-αpliDX, Alarm Clock or Scheduler requires Date and Time Setting. Set the date and time correctly before start. ☛P47

● Delete software and IC card data?

Among the i-αppli to delete selected items or all items, there is Osaifu-Keitai compatible i-αppli of which the data within IC card are also deleted by deleting the i-αppli. Select ***Yes*** to delete the i-αppli and the data in IC card.

● Dial callout restricted.

This prohibited operation is unavailable with Keypad Dial Lock on.

● Download failed.

Communication was interrupted during reception. Please move to another location with good radio reception and retry.

● Error in IC card data. Unable to delete software.

Osaifu-Keitai compatible i-αppli containing errors within IC card data cannot be deleted.

● Error in image. Does not work correctly.

Flash movie cannot be displayed because of the error in the image data.

● Error in memory. Unable to read/write PushTalk phone book. Quit.

Unable to read or write the PushTalk phonebook because the memory space for the FOMA terminal phonebook and PushTalk phonebook contains error. Activate the FOMA terminal phonebook. Activating the FOMA terminal phonebook restores the memory space.

● Error in ToruCa data. Unable to download.

The data of ToruCa is incorrect.

● Error occurred. Unable to save.

Cannot be saved because an error occurred during saving attachment.

● Exceeded number of maximum characters. Failed to quote partly.

SMS message exceeded 70 characters (160 characters for the font type of English) for reply, so some characters cannot be quoted.

● Exceeds maximum number member.

PushTalk calls were made for above 4 members.Select members up to 4 persons.

● Failed to clear call cost information.

The UIM is not correctly installed or the card is faulty. ☛P38

● Failed to connect

Failed to connect to the server. Please move to another location with good radio reception and retry.

● Failed to copy.

- When copying selected items or all items of Data Box, all data cannot be copied.
- An attempt has been made to copy PIM data in an uncopiable format.
- PDF data cannot be copied because the memory space is insufficient. Retry after returning to the standby display.

● Failed to move.

When moving selected items or all items of the data, all data cannot be moved.

● Failed to read call cost information.

The UIM is not correctly installed or the card is faulty. ☛P38

● Failed to refer to ToruCa.

Failed to display ToruCa. Retry the operation. In case the same error occurs again, displaying may be unavailable due to the damaged data.

● Failed to retrieve i-Channel information.

Failed to connect to the i-mode Center. Please move to another location with good radio reception and retry.

● Failed to save ToruCa.

ToruCa could not be saved because ToruCa exceeds the size that can be saved or the data is incorrect.

● Failed to save./Unable to save.

- Cannot be saved due to an error.
- Failed to save because PDF data is too large, etc.

● Failed to view message data.

- When deleting or searching mail, the object mail data cannot be referenced because it is used for another processing. Retry later.
- Mail data cannot be referenced in chat mail. Retry later.

● Folder is full.

Unable to receive Message R/F because the memory space is insufficient. Please read unread Message R/F, release protection of Message R/F or delete unnecessary Message R/F.

 Note: The miniSD memory card is not included in the bundle and needs to be purchased. ☛P331

● Frame number of this page is not supported.

Cannot display because the number of frames is too many.
In the multi-windows mode, it may be displayed when closing the open windows.

● i-αppli stand-by display canceled due to security error.

i-αppli standby display has exited due to unpermitted operation.

● i-mode Center is busy. Please try again later. (555)

The i-mode Center is busy. Please try again later.

● Inbox full. Unable to retrieve new messages.

Unable to receive all SMS messages because there is insufficient storage space in the Inbox of FOMA terminal or the UIM. Please read unread mail, release mail protection or delete unnecessary mail and execute Check SMS again.

● Inbox is full.

Unable to receive i-mode Mail because there is insufficient memory space in the Inbox. Please read unread i-mode Mail, release i-mode Mail protection or delete unnecessary i-mode Mail.

● Incoming message data damaged. Restore default settings?

The received data of chat mail contains error. Select ***Yes*** to return to the default setting. Select ***No*** to quit chat mail without returning to the default setting.

● Infrared Connection interrupted.

An error occurred during infrared communication. During infrared communications, do not move FOMA terminal pointed at the other terminal's infrared data port before data sending and receiving is complete. ☛P347

● Infrared Failed to connect via authentication.

Sending all data was failed because the authentication password is not correct. Enter the same authentication password between sender and receiver. ☛P348, P349

● Infrared No response. Retry data exchange?

After entering into the infrared communication state, 5 or more seconds have elapsed with no other terminals for communications found. Point FOMA terminal at the other terminal's infrared data port with a distance of 20 cm or less and select ***Yes***. ☛P347

● Infrared No UIM. Unable to start requested software.

Because no UIM is inserted, the specified i-αppli cannot be started even when i-αppli To is set in the data received by infrared communications.

● Input error (205)

Input data for i-mode or Internet web site contains error. Check the input data for errors.

● Insufficient memory./ Memory shortage Return to Main Menu.

Operation is interrupted due to insufficient memory.

● Insufficient memory. Quitting application.

The running function is terminated due to insufficient memory.

● Insufficient memory. Unable to edit signature. Delete signature.

When editing the signature is started, memory shortage occurs. Delete the data of signature.

● Insufficient memory. Unable to open window.

Windows cannot be opened because the memory is insufficient. Executing may be available by closing the windows opened already or terminating other running functions.

● Invalid content. Change i-motion type for replay. Change now?

You tried to download a streaming type i-motion file with the i-motion type setting ***Normal type***. Select ***Yes*** to change the i-motion type setting. Select ***No*** if you don't change the setting. ☛P221

● Invalid content. Download failed.

Cannot download because the object contents to be charged are invalid.

● Invalid data.

The downloaded data contains an error.

● Invalid data. (XXX)

- Dose not support the specified i-mode or Internet web site.
- The URL may be incorrect. Make sure that the URL is correct.
- Unable to display because there is an error in the received data.
- Within service area, sending auto send mail was unsuccessful.

● Invalid data. Connection cannot be established. (400)

- Cannot be connected because of the error in i-mode or Internet web site. The URL may be incorrect. Make sure that the URL is correct.
- Within service area, sending auto send mail was unsuccessful.

● Invalid data. Failed to save.

Attached melodies or video/i-motion files cannot be played because of the incorrect data.

● Invalid data. Unable to save.

Data received through infrared communications cannot be saved because it is in a format incompatible with FOMA terminal.

● Invalid data. Unable to save.

The downloaded Chara-den cannot be saved because the Chara-den is invalid.

● Invalid UIM or phone type.Unable to use.

Video/i-motion cannot be played because the different UIM from that used when saved is inserted or the model is different.

● Invalid UIM, requested service not available.

You tried to use data downloaded from i-mode or Internet web site or saved from attachments of mail or Message R/F with a UIM different from the one you used when the data was saved. Insert the same UIM as used when those data were downloaded to use it.

● Invalid UIM, requested software failed to start.

The i-αppli to be used together with the UIM used when downloading it from a site, etc. cannot be started. Insert the same UIM as used when the software was downloaded to use it.

● Invalid URL.

The entered URL contains error. Check the URL.

● Mail address not recorded.

The mail address is not saved in the selected mail group. Save the mail address in the mail group. ☛P257

● Mails could not be sent to following address. (561)

Sending i-mode Mail is failed for some receivers. Pressing displays the receiver that the transmission failed. Check to see if the address of the receiver is correct and retry transmission at another location with good radio wave condition.

● Memory full. Delete unwanted data.

Unable to register/delete in the PushTalk phonebook and add/edit/delete members in PushTalk group because the memory space for the FOMA terminal phonebook is insufficient,. Delete the unnecessary data in the FOMA terminal phonebook.

● Memory in My Picture/Other Images/Movie/Melody folder full./My Documents folder full./Number of saved movies in Other Movie folder reached limit./Number of saved cards in ToruCa folder reached limit./Number of saved data reached limit in PIM folder.

Copying/moving selected items, copying/moving all items, back up and Sync Data Info is unavailable because the number of saved items in folders of the miniSD memory card is full. Delete unnecessary data. ☛P338, P340

● Memory is full. Unable to save.

FOMA terminal does not have enough memory space and SMS cannot be saved. Move SMS to UIM or delete i-mode Mail or SMS.

● Message kept in center.

SMS messages have already been sent.

● Message rejected by recipient.

SMS is rejected by the SMS Center.

● Message rejected by recipient.

Transmitting SMS is rejected.

● miniSD card damaged. Saving to phone memory.

When ***miniSD*** has been specified as the destination for saving still images or videos recorded with the camera or Chara-den but the miniSD memory card cannot be accessed, the destination automatically switched to ***Phone***.

● miniSD card full. Saving to phone memory.

When the miniSD memory card becomes full with ***miniSD*** set as the destination in Still Image Setting or Recording Setting for the camera, the destination is automatically switched to ***Phone***.

● miniSD card memory full.

Copying/moving selected items, copying/moving all items, back-up of data and update of information is not allowed because the storage space in the miniSD memory card is not enough. Delete unnecessary data. ☛P338, P340

● Name too long. Saved with incomplete name.

When registering an item selected from the display of a site, etc. to the phonebook, the number of characters has exceeded the specified value. Pressing causes the phonebook registration screen to be displayed, with characters exceeding the limit deleted for each item.

● New pattern definitions for scanning function available. Please update.

Auto-update of the pattern definition was unsuccessful. Update the pattern definition manually. ☛P462

● No content is available. (204)

Could not find data at the specified site.

● No data in ordinary phonebook.

The entered phone number is not saved in the phonebook. Add the number to the phonebook.

● No miniSD card found.

Data cannot be saved or operated because a miniSD memory card is not inserted to FOMA terminal. Insert the miniSD memory card before operating. ☛P335

● No miniSD card, or no music data. Use included software and put music data on miniSD card.

The miniSD memory card is not inserted or there is no folder for Music Player in the miniSD memory card or no data in the folder. Insert the miniSD memory card or save the music data. ☛P335, P359

● No Requested File. (492)

The specified file could not be found during download of a still image above 10,000 bytes which could not be obtained when having received the mail.

● No requested software.

The i-αppli specified by the mail and external equipment is not stored in your FOMA terminal.

● No response. (408)

Communication was disconnected because there was no response from i-mode or Internet web site within the specified time. Retry later.

● No signature set.

Please retry to operate after registering the signature. ☛P256

● No space to attach signature.

- The signature cannot be inserted because of exceeding the maximum characters.
- The signature cannot be inserted in SMS because it is decorated.
- The signature cannot be inserted when ***English*** is set for ***Font type*** in SMS Setting. Change ***Font type*** to ***Japanese***. ☛P266

● No space to attach file.

Exceeds the maximum number of files attachable to one mail.

 Note: The miniSD memory card is not included in the bundle and needs to be purchased. ☛P331

● Not enough memory. Unable to connect.

Cannot connect because the memory is insufficient. Closing the window opened already or terminating other running functions may make connecting available.

● No UIM, requested software failed to start.

The i-αppli to be used together with the UIM used when downloading it from a site, etc. cannot be started. Insert the same UIM as used when the software was downloaded to use it.

● Now calling. Unable to record movie.

When using the camera during a call, it cannot be switched to video shooting and voice recording. End the call before switching to video shooting and voice recording.

● Number of characters exceeds limit.

i-mode Mail message exceeded 10,000 one-byte (5,000 two-byte) characters for reply. Please send after decreasing the number of characters.

● Omakase Lock active.

Operations are disabled because Omakase Lock (Remote Lock) is set. You can answer incoming calls. ☛P159

● Out of service area.

Unable to execute because the terminal is in a place where radio waves do not reach or out of the service area.

● Outgoing message data damaged. Restore default settings?

The sent data of chat mail contains error. Select ***Yes*** to return to the default setting. Select ***No*** to quit chat mail without returning to the default setting.

● Page is not found. (404)

Unable to find i-mode site, etc. Make sure that the URL is correct.

● Password is not correct. (401)

The user name or password entered in the basic authentication screen of i-mode or Internet web site is incorrect. Please try again.

● PIM lock.

This prohibited operation is unavailable with PIM Lock on.

● Please wait.

The voice line/packet communication equipment is damaged or the voice line network/packet communication network is so congested. Please try again later.

● Please wait for a while (packet)

The packet communication equipment is damaged or the packet communication network is so congested. Please try again later.

● PUK blocked.

Inquire at DoCoMo Shops.

● Receiving data/Content length exceeds maximum size for i-motion

Reception was suspended because the size exceeded 2 Mbytes when downloading streaming type i-motion data.

● Receiving data/Content length exceeds replayable size for i-motion

Reception or replay has not been completed because the data size exceeded 500 Kbytes when downloading normal type i-motion data or when playback was performed while downloading data.

● Receiving messages. Retry later.

i-channel cannot be activated during receiving mail or Message R/F. Retry after receiving.

● Receiving messages stopped. Some messages unreceived.

Unable to receive all SMS messages because an error occurred during reception. Please move to another location with good radio reception and execute Check SMS again. ☛P266

● Registration is in progress. (554)

User registration with i-mode is in process. Please try again later.

● Remotely Controllable services denied.

Voice Mail Service and Call Forwarding Service has not subscribed yet. It is required to subscribe to Voice Mail Service or Call Forwarding Service.

● Replay period has not yet started.

Unable to play because of the term prior to the playback period specified for i-motion. Please try again after the playback period has started. ☛P321

● Requested software unavailable.

The i-αppli cannot be started because of an error in i-αppli. Starting specified i-αppli by i-αppli To function from a site, mail or an external device is disabled if there is a problem in i-αppli operation settings or start-up conditions.

● Root certificate has expired. Connect?

The term of validity of FOMA terminal certificate is premature or overdue. Select ***Yes*** to connect or ***No*** not to connect. ☛P217 This message may be displayed when the date and time have not been set or are incorrect. Set the date and time correctly. ☛P47

● Root certificate is not valid.

The certificate in FOMA terminal is invalid. To establish a connection, change the setting. ☛P217

● Run software and delete data on IC card. Then delete software.

This i-αppli cannot be deleted without deleting the data in IC card. Delete the i-αppli after activating the i-αppli and deleting the data in IC card.

● Save unsaved data to phone memory or delete.

Infrared communications cannot end because the number of items to be saved is full in INBOX for infrared communications. Save the data in Inbox into FOMA terminal or delete it. ☛P350

● Scheduled software update canceled. Retry update software.

Reservation for updating software is canceled because the battery has not been charged for a long while, etc. Start updating software and operate for reservation again. ☛P458, P460

● Self Mode activated.

This prohibited operation is unavailable during Self Mode.

● Service is not registered.

- You are not an i-mode subscriber. Apply to use the i-mode service.
- If you have subscribed to i-mode after purchasing FOMA terminal, once turn FOMA terminal power off and then turn on.

● Service unavailable.

SMS is not available.

● Signature, template and sort settings data damaged. Restore default settings?

The data of signature, template and sort settings contain the error. Select ***Yes*** to return to default settings. Cannot be activated without returning to default settings.

● Size of this page is not supported.

- Downloading has stopped because i-mode or internet web site size was larger than the limit size. Press ⊙ to display the data already downloaded normally.
- Reception was interrupted because the data size exceeds maximum size while downloading.

● Software ended due to security error.

i-αppli has exited due to unpermitted operation. It is recorded in Security Error History.

● Software already updated.

The i-αppli cannot be upgraded because it has already been upgraded to the latest version.

● SSL session cannot be established./TLS/SSL session cannot be established.

SSL or TLS/SSL communication was interrupted due to an SSL or TLS/SSL communication error or an error on the server concerning the client authentication.

● SSL session failed. /TLS/SSL session failed.

A problem was detected with the authentication process during SSL or TLS/SSL communication. Connection is suspended.

● SSL session was terminated. TLS/SSL session was terminated.

Some problem is detected with the site certificate during SSL or TLS/SSL communication.
The message is displayed when you select ***No*** in the connection confirmation screen and SSL or TLS/SSL communication is disconnected.

● Terminal memory full.

Cannot be executed because the number of saved items in FOMA terminal is full or the memory is not enough. Delete corresponding unnecessary data.

● This certificate is not valid for this URL. Connect?

CN name (server name) of the site certificate does not match the actual server name. To connect, select ***Yes***; to stop, select ***No***. ☛P217

● This data cannot be saved. Download?

This i-motion file cannot be saved. Select ***Yes*** to download; select ***No*** not to download.

● This data may not be replayed.

Video/i-motion file format not supported by FOMA terminal. Or the video file may be damaged.

● This site is not certified. Connect?

The site certificate is not supported by FOMA terminal. Select ***Yes*** to connect or ***No*** not to connect.

● This software contains an error./This software contains an error. Unable to download.

Unable to download because the i-αppli data contains an error.

● This software is currently unavailable for use.

Using the i-αppli is stopped by IP (Information Provider).

● This software is not supported by this phone.

The i-αppli cannot be downloaded because it is not compatible with FOMA terminal.

● This ToruCa can not be saved.

The ToruCa is not supported.

● This UIM cannot be recognized.

The UIM is not correctly installed or the card is faulty. Check if the UIM is installed correctly. ☛P38

● Time out

The i-mode Center is busy. Please try again later.

● Too much data was entered.

Unable to transmit data because too many characters were entered in the entry field of i-mode or Internet web site. Please reduce the number of characters and retry transmission.

● ToruCa limit reached. Unable to receive. Delete a ToruCa.

ToruCa cannot be downloaded because the number and the memory for saving ToruCa is full. Delete unnecessary ToruCa.

● ToruCa limit reached. Unable to download. Delete a ToruCa.

ToruCa cannot be saved because the storage space for ToruCa is not enough. Delete unnecessary ToruCa.

● Transmission failed.

Failed to transmit the i-mode Mail or SMS. Please move to another location with good radio reception and retry transmission.

● Transmission failed. (552)

Failed to transmit the i-mode Mail or SMS due to the error of i-mode Center or the SMS Center. Please try to send again later.

● UIM full.

UIM does not have enough storage space and SMS cannot be saved. Delete SMS from the UIM (☛P268) or move to FOMA terminal (☛P268).

● UIM not inserted. Unable to use.

The UIM is not inserted. Please use your FOMA terminal after inserting the UIM. ☛P38

● UIM not recognized. Unable to use.

Cannot be executed because UIM is not inserted. To play the video/i-motion, insert the same UIM as that used when saved.

● Unable to call.

A voice/videophone call or PushTalk call cannot be made during voice/videophone calls, PushTalk call or 64K data communication.

● Unable to check new messages.

Please move to another location with good radio reception and retry. If the error persists, try again later.

● Unable to connect during outgoing call barring active.

Cannot connect because the outgoing call is restricted. Retry to operate later.

● Unable to connect to server now.(502)

The equipment of the Data Center is damaged or the Data Center is congested. Retry to operate later.

 Note: The miniSD memory card is not included in the bundle and needs to be purchased. ☛P331

● Unable to delete some applications on IC card. Delete others?

Among the i-αppli to delete selected items or all items, Osaifu-Keitai compatible i-αppli which cannot be deleted exists because the data within IC card cannot be deleted. Select ***Yes*** to delete other i-αppli than that.

● Unable to display data.

Display failed because an error occurred in mail template.

● Unable to display image.

Unable to display because the image contains error. Check the image.

● Unable to display message.

Unable to display because there is an error in the received/sent mail.

● Unable to display some files.

Video/i-motion or an image above 10,000 bytes is attached to the downloaded mail. These data cannot be displayed/played from the downloaded mail.

● Unable to display this Chara-den.

Chara-den containing illegal data cannot be displayed.

● Unable to display version info.

The definition file version cannot be confirmed. Update the definition file again. ☛P462

● Unable to receive ToruCa.

The data of ToruCa is invalid.

● Unable to download data.

Failed to download ToruCa (details). Retry the operation. In case the same error occurs again, downloading may be unavailable due to the error in ToruCa data, etc.

● Unable to download. Data exceeds maximum size. (452)

Reception is disabled because i-mode or Internet web site size exceeds the maximum size.

● Unable to enter any more.

The number of characters exceeds the limit. Reduce the number of characters.

● Unable to move specified page.

When an i-motion ticker contains a link to a site (Web To), etc., in case the URL contains more than 256 characters or downloading was interrupted, the linked page cannot be displayed.

● Unable to obtain data due to replay restriction data error.

Cannot obtain because the replay restriction data is incorrect.

● Unable to play.

Melody or i-motion data cannot be played.

● Unable to play.

The music data cannot be played.

● Unable to play this melody.

This melody cannot be played because the data contains an error.

● Unable to play this movie.

No data or the format of the video/i-motion is unavailable.

● Unable to record.

The movie memo cannot be recorded because the communication of image/sound is disconnected.

● Unable to retrieve the requested URL. (504)

Failed to connect to the requested URL due to some cause. Please try again later.

● Unable to save specified image.

The image cannot be saved because the image in the site, screen memo or Message R/F contains error.

● Unable to shoot serially.

You cannot shoot continuously because memory and the number of items to be saved in ***Image*** is full. Continuous shoot is canceled automatically.

● Unable to switch to data transfer mode.

FOMA terminal is communicating. Processes cannot be performed because switching to data transfer mode is unavailable. Terminate communicating or retry again later.

● Unable to update pattern definitions.

Updating the definition file has failed. Stop all other functions currently running and retry the update in a place with strong radio wave signals.

● Unable to use data type.

Data in a file format incompatible with FOMA terminal cannot be copied or moved from a miniSD memory card to FOMA terminal or searched for.

● Unable to view file. Access to URL is limited. (491)

The specified access count was exceeded while downloading a still image above 10,000 bytes which could not be obtained when having received the mail.

● Unsent message data damaged. Restore default settings?

The unsent data of chat mail contains error. Select ***Yes*** to return to the default setting. Select ***No*** to quit chat mail without returning to the default setting.

● Unsupported content.

Operation is unavailable because the contents are not compatible with FOMA terminal.

● Unsupported miniSD card format.

The miniSD memory card format is unavailable on FOMA terminal.

● URL address changed. (301)

i-mode or Internet web site forwards URL automatically or URL is changed.

● URL is too long to register.

Unable to register as a bookmark or a screen memo because the URL exceeds the number of characters that can be registered.

● Usage is currently restricted. Try again later.

Displayed in case extremely large data communication is executed within the specified duration only when using i-mode packet fixed sum service. Connection may be unavailable for a certain period of time, so use i-mode/Full Browser a little while later.

● Voice data damaged and unable to start. Please record voice data.

The voice cannot be authenticated because the registered voice data is damaged. Please register the voice data again. ☛P300

● You have no certificate. Connect?

The user certificate has not been downloaded. To continue the connection, select ***Yes***; to stop, select ***No***.

● Your certificate has expired. Connect?

The user certificate has expired. To continue the connection, select ***Yes***; to stop, select ***No***. ☛P217

Warranty and After-Sales Service

Warranty

- A written warranty is provided with every FOMA terminal; make sure that you receive it.
  Store the warranty in a safe place when you have read it and checked that it contains the “shop name/date” you purchased it. If it does not contain the necessary information, contact the shop where you bought it. The warranty is valid for a period of one year from the date of purchase.
- This product and all accessories are subject to change, in part or whole, for the sake of improvement without prior notice.
- Data registered in the phonebook, etc. may be lost or become corrupted due to failure, repair or other handlings of FOMA terminal. It is recommended that you make a note of the data in the phonebook, etc. When your FOMA terminal is repaired and so on, downloaded information via i-mode or i-αppli (except some data) are not forwarded to a new FOMA terminal according to the copyright laws.
  * In this FOMA terminal, the phonebook data, etc. can be saved in the miniSD memory card.
  * In this FOMA terminal, i-motion files, etc. can be moved to the miniSD memory card.
  * In this FOMA terminal, the phonebook data, etc. can be saved in Data Center by subscribing to Data Security Service (which is a pay service and requires a subscription).
  * If you have a PC (Windows Me, 2000, XP), you can use the specified data link software and FOMA USB cable (optional) to transfer and store the data registered in the phonebook, etc. on a PC.

After-Sales Service

■ When problems occur

Before requesting service, read the section “Troubleshooting”. ☛P446
If the problem still persists, contact “Repairs” on the back of this manual.

■ If the result of inquiries indicates that a repair is required

Take your FOMA terminal to a repair office designated by DoCoMo. Be sure to check the opening hours of the repair office before you go. Note that you must present the warranty.

■ In the warranty period

- The FOMA terminal will be repaired at no charge subject to the conditions of the warranty.
- The written warranty must be presented to receive warranty service. The subscriber will be charged for the repairs without presentation of the written warranty or repairs of defects resulting from misuse, accident or neglect, etc. even during the warranty period.
- The subscriber is charged even during the warranty period for the repair of failures caused by the use of devices or consumable items that are not DoCoMo-specified.

■ Repairs may not be possible in the following cases:

Repair may not be possible when corrosion due to exposure to moisture, condensation or perspiration is detected in a moisture seal reaction or test, or if any of the internal boards are damaged or deformed. Since these conditions are outside the scope of the warranty, a repair, if at all possible, will be charged.

■ After expiration of the warranty

All repairs that are requested are charged.

■ Replacement parts

Basically, FOMA terminal’s replacement parts (parts required to maintain product function) will be kept in stock for at least 6 years after termination of production. Please keep in mind that it may not be possible to repair your phone depending on the nature of the required repair because of a lack of parts, etc. Depending on the nature of the required repair, it may still be possible to repair your phone even after this period. Contact “Repairs” listed on the back of this manual.

■ Notes

- Do not modify the FOMA terminal or its accessories.
  - Fire, injury or damage may result.
  - In order to prevent interference of radio waves or network breakdown, the FOMA terminal and UIM are manufactured according to technical standards stipulated by law. Do not use FOMA terminals or UIMs that do not meet these standards.
  - If the FOMA is modified (part replacement, modification, painting, etc.) it will be repaired only after the modified parts have been restored to the condition at the time of purchase. However, repair may be refused depending on the nature of modification.
  - Repair of failures or damage caused by modification are charged even during the warranty period.

Note: The miniSD memory card is not included in the bundle and needs to be purchased. ☛P331

- Do not remove any inscription stickers attached to your FOMA terminal.
  The inscription stickers certify that the FOMA terminal satisfies specific technical standards. Note that if stickers are removed intentionally or are reattached in such a way that confirmation of the sticker's contents is impossible, repair or servicing may be refused because confirmation of whether or not the phone conforms to relevant technical standards cannot be made.
- The function settings, the information of total calls duration, etc. may be cleared (reset) by failure, repair or other handling processes. Should this happen, set up the functions again.
- Magnetic components are used in the earpiece and speaker of the FOMA terminal. Do not allow cash cards or other devices that are vulnerable to magnetism to come into contact with the phone.
- If your phone becomes wet or moist, turn the power off and remove the battery pack immediately and bring it to a repair office as soon as possible. However, repair may not be possible depending on the condition of the phone.

■ **Phonebook data or downloaded data**

- Maintain a separate record of the data you register in your FOMA terminal. DoCoMo will not accept any liability and responsibility whatsoever for changes or loss of information.
- Data created, imported or downloaded by the subscriber may become corrupted or be lost when changing the model or repairing mobile phone. DoCoMo will not accept any responsibility for that.
  Also, DoCoMo may, at its option, repair a mobile phone by replacing it. In such an event, it will not be possible to transfer the data (except some data) to the new phone. Regarding this FOMA terminal, images and incoming melodies downloaded via i-mode official sites can be transferred when repairing the mobile phone (some contents cannot be transferred and transferring may be unavailable depending on the degree of malfunctions).

Updating software

Software Update

This function checks for the necessity for updating FOMA terminal software and downloads part of the software as required through packet communication*1 to make updates of the software.

When software update is required, the information will be posted in *お知らせ＆ヘルプ*(Notice & Help) on the DoCoMo website or iMenu.

*1 Packet communication for software update is free of charge.

- Software may be updated in the following 2 methods:
  - Immediate update：
    Update on the spot as desired.
  - Advanced update：
    Reserve a day and time-slot for automatic update of the software in the specified day and time.
- Software cannot be updated in the following cases:
  - During All Lock
  - While using other functions
  - When the date and time are not set
  - When the UIM is not inserted
  - When the battery is not fully charged
  - When PIN1 code is being entered
  - When PIN1 code is locked
  - When *圏外* is indicated
  - During PIM Lock
  - The power is off
  - In Self Mode on
  - While talking
  - During Omakase Lock (Remote Lock)
  - During packet communication connecting with a PC
- At the time of updating software, the unique information of your mobile phone terminal (model or serial number, etc.) will be automatically sent to the server (the server for updating software managed by DoCoMo). DoCoMo will not use the sent information for any other purpose than software update.

INFORMATION

- Software update (downloading or rewriting) may take time.
- If software update is executed when ***ON*** is set for PIN1 Code On/Off, the PIN code entry screen will be displayed at the time of automatic reload after completion of software updating. You cannot make/receive calls or PushTalk calls and operate communication functions if the incorrect PIN1 code is entered.
- Other functions are not available while software is being updated. Only incoming voice calls can be answered while downloading.
- If Movie ringtone has been set as a ring alert, a melody sounds for an incoming call during download instead of Movie ringtone. If you set video/i-motion as an image, the first image is displayed.

- Any incoming videophone call cannot be answered during download. Unanswered calls are recorded as missed ones in the received call history.
- Even if an alarm clock or any alarm is set while software is being updated, the updating continues without activating the alarm clock or the alarm.
- For software update, SSL session is established to the server (our site). Enable SSL certificate in Certificate Setting. Configured as valid by default. ☛P217
- Software update should be done with battery fully charged and enough battery power ( ).
- It is recommended that software update be executed when good signal quality is obtained, 3 bars of the antenna icon ( ) are displayed and the terminal is not being moved.
  - If radio wave signals become weaker during software downloading or downloading has stopped, retry software update in a place with strong radio wave signals.
- A displayed icon for the message stored at i-mode Center disappears after software update.
  If Receive Option Setting is set to ***ON*** and mail arrives during software updating, the screen that notifies an arrival of mail in the i-mode Center may not appear after the software update being completed.
- Never remove the battery pack while updating software. Update fails.
- Software update can be done while various data, such as the phonebook/PushTalk phonebook entries registered in FOMA Terminal, camera images, downloaded data are retained; however, note that data protection sometimes cannot be secured depending on the conditions of your FOMA terminal (such as malfunction, damage, or water leak). DoCoMo recommends backing up necessary data. (Note that some data such as downloaded data may not be backed up.)
- When software update has failed, the message ***Rewrite failed*** appears and all the operations are unavailable. In such a case, please bring FOMA terminal to a repair office designated by DoCoMo.
- In case updating is not required, when checking the necessity of software update, a message is displayed indicating update is not necessary, so use as it is.
- Software update is available even if Host Selection is set to other than i-mode.

Starting software update

1 Menu 8 8 6

2 **Enter the terminal security code ▶ Check notice and ●**

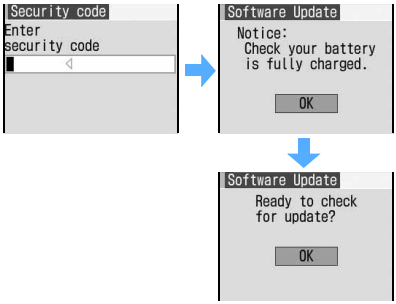

- The entered terminal security code (4 to 8 digits) is displayed as " ✳ ".
- The terminal security code by default is set to "0000".

3 **● ● ▶ Confirm whether software update is required**

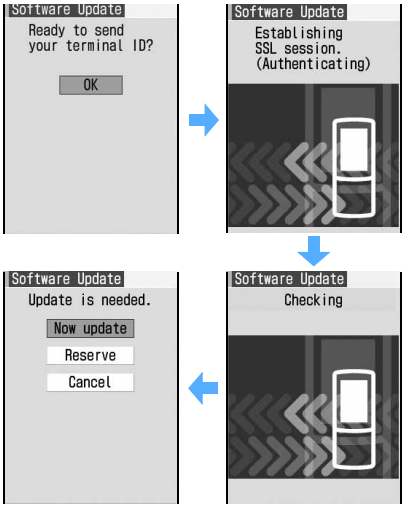

- Pressing ● on the confirmation screen for sending terminal ID makes connection to the server and your private information concerning the mobile phone (such as model, serial number) is sent.

■ When updating is not necessary:

If software updating has been found to be unnecessary as a result of checking for the necessity of updating, the screen as shown on the left is displayed. Press ● to use FOMA terminal as it is.

Updating software immediately Immediate Update

- Immediate update may not be available when the server is busy.

1 Display the selection screen for the update procedure



2 Select *Now update* ▶ ⊙

Downloading is started and the Enter key flashes.



- Downloading starts in about 5 seconds without pressing ⊙.
- Press ⊙ to cancel downloading. If downloading is canceled halfway, the data downloaded up to then is deleted.
- After starting downloading, updating process is executed without the operation of selecting the menu.

■ When the server is busy:

- Select ***Reserve*** and reserve a date and time for update.

3 ⊙ after completion of downloading

During rewriting, the Enter key flashes.

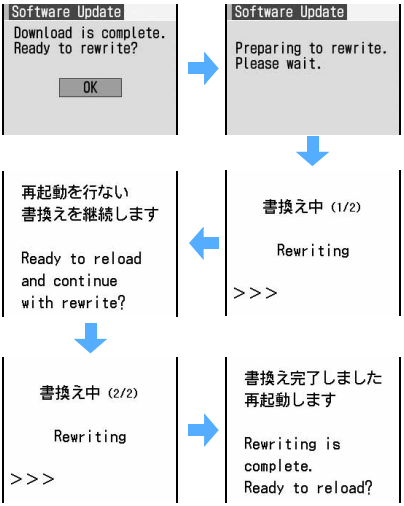

- Rewriting is started in about 5 seconds without pressing ⊙ after downloading.
- All key operations are disabled while software is being rewritten. Updating operation cannot be canceled.

4 Automatically reloaded after the completion of rewriting

After reload, wait while communicating again with the server.

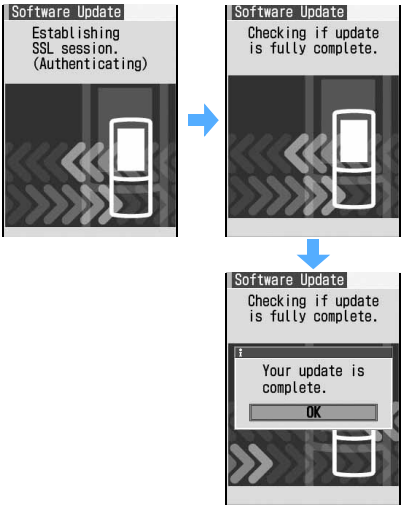

5 Press ⊙

Update is completed and the standby display appears.

Updating software at pre-specified time

Reserved Update

When downloading takes time or the server is busy, you can choose to set the time to start software update in advance by communicating with the server.

1 Display the selection screen for the update procedure

2 Select *Reserve*

Inquire the options for preferred day and time by communicating with the server.



- Available date and time for reservation will be shown by the time of the server.

3 Select preferred day and time

■ **Selecting from the options displayed:**
Select preferred day and time ▶ Select *Yes*





- If there are more than one option page for preferred day and time, switch to the next or previous page with ⊙.

■ **Selecting from other than options displayed:**
① Select *Others* ▶ Select preferred day and time-slot





Availability for reservation at each time-slot will be shown:
○: available
△: barely available

② Select preferred day and time-slot

Connection is made to the server and the options close to preferred day and time-slot are displayed.

- If there are more than one option page for preferred time-slot, switch to the next or previous page with ⊙.
- Press ⊞ to display the description of the symbol on the left of time-slot.

③ Select preferred day and time ▶ Select *Yes*

- If there are more than one option page for preferred day and time, switch to the next or previous page with ⊙.

4 Press ⊙

Reservation is completed and the menu is displayed.

- is shown on the standby display when reservation is made.

Checking/changing/canceling reservation

1 Menu 8 8 6

2 Enter the terminal security code ▶ Check the contents



- To stop checking:
Select ***OK***

■ **Changing reservation:**

① **Select *Change***

A confirmation screen for sending your terminal ID is displayed.

② ⊙

The option selection screen is displayed.

- Follow the procedure from Step 2 in "Updating software at pre-specified time". ☛P460
- Pressing ⊙ on the confirmation screen for sending your terminal ID makes connection to the server and your private information concerning the mobile phone (such as model, serial number) is sent.

■ **Canceling reservation:**

① **Select *Cancel* ▶ Select *Yes***

A confirmation screen for sending your terminal ID is displayed.

② ⊙⊙

The reservation is canceled and the menu is displayed.

- Pressing ⊙ on the confirmation screen for sending your terminal ID makes connection to the server and your private information concerning the mobile phone (such as model, serial number) is sent.

When the reserved time arrives

When the reserved time arrives, the screen as shown below is displayed and updating software is started automatically. Before the reserved time, make sure that the battery is fully charged and the handset is in a location where radio waves reach and then show the standby display.

When downloading is completed, rewriting software is automatically started, followed by reload.



- To cancel the software update: ☎ ▶ Select *Yes*

INFORMATION

- Note that updating software may not be activated even though the reserved time arrives in case of using the other functions. In case the reserved time arrives while talking or receiving messages, updating software starts after finishing talking or receiving messages.
- If software update is executed when *ON* is set for PIN1 Code On/Off, the PIN code entry screen will be displayed at the time of automatic reload after completion of software updating. You cannot make/receive calls or PushTalk calls and operate communication functions if the incorrect PIN1 code is entered.
- If an alarm clock or any alarm is set for the same time, the alarm clock or the alarm takes precedence and the software update may not be started.

Protecting FOMA terminal from hazardous data

Virus Scan Function

Update pattern definition first to keep the pattern definition up-to-date.

For the data or program downloaded via a website or received mail, this function detects data that may cause troubles and then deletes it or inhibits activation of applications in order to protect FOMA terminal from viruses.

- Pattern definition is used for checking. Update pattern definition because it is updated whenever a new trouble is detected.
- Virus Scan Function is for preventing the data that cause some problem to mobile phone from invading when viewing websites or receiving mail. Please note that if pattern definition corresponding to specific troubles has not been downloaded to the mobile phone or such pattern definition does not exist, this function cannot prevent the trouble from happening.
- Pattern definition is different depending on the model of mobile phone. Please keep in mind that DoCoMo may stop distributing the pattern definition for the models that have been on the market for 3 years or more.
- When updating pattern definition, your private information concerning the mobile phone (model, serial number, etc.) is automatically sent to the server (the server for the scan function managed by DoCoMo). DoCoMo does not use the sent information for purposes other than the scan function.

Setting Virus Scan Function

Scanning Setting

If this setting is set to *ON*, data or program is checked automatically when it is displayed or executed.

Default ON

1 Menu 8 3 7 3

2 1 ▶ **Select *Yes***



- When Virus Scan Function, when set, has detected data that may cause troubles, it displays a message in one of 5 warning levels. ☛P463
- To cancel: 2 ▶ Select *Yes*

Updating pattern definition automatically

Auto-update Setting

Updating is performed automatically to maintain the latest pattern definition.

1 Menu 8 3 7 2

2 **Select *Enable* ▶ Select *Yes* twice**



- To cancel: Select *Disable* ▶ Select *Yes*

3 **Press ◉**

When a new pattern definition is distributed



- When a new pattern definition is distributed, the above screen appears and updating pattern definition is performed automatically. In case of succeeding updating, is displayed on the standby display. Select an icon and select ***OK*** after confirming a message.
- In case of failing updating, appears on the standby display. Update a pattern definition manually after selecting an icon, confirming a message and selecting ***OK.***
- To stop updating pattern definition: ◉ ▶ Select *Yes*

Updating pattern definition Immediately

Update Definition

Update a pattern definition manually in case Auto-update Setting is set to ***Disable*** or Auto-update fails.

- Set the date of FOMA terminal correctly.

1 Menu 8 3 7 1

2 **Select *Yes* twice**

The pattern definition is updated.

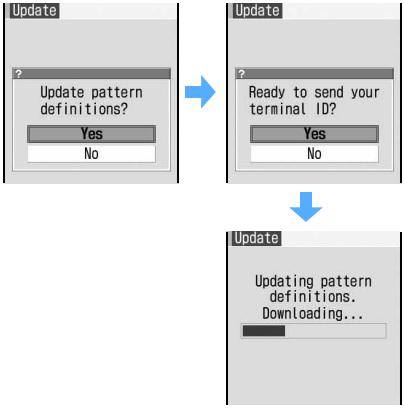

3 **Press ◉**

- If pattern definition update has been found to be unnecessary as a result of checking for the necessity of updating, the message meaning that the pattern definition is up-to-date is displayed. Please use FOMA terminal as it is.

INFORMATION

- Updating pattern definition is stopped with a voice call arrived. When there is a videophone call, incoming PushTalk or data is received using an external device or the infrared communication function, updating is not interrupted.
- If the date/time set for an alarm clock or a schedule alarm is reached, the screen for notifying the date and time is displayed during updating of pattern definition and the alarm clock or the alarm sounds, but updating is continued.

Displaying the scan result

When displaying a list of detected problem elements



1 **Select *Detail* while a warning message is being displayed**

The list of the name of problem elements detected by scan is displayed.

- When 6 or more problem elements have been detected, the names of the 6th and subsequent problem elements are omitted and the total count of the detected problem elements is displayed.

Display of the scan result

Warning level/ Message	Handling method
Warning Level 0 Problem detected. Operation may not run properly. OK Detail	***OK*** : Continues processing of the started application. ***Detail*** : Lists names of the detected problem elements.
Warning Level 1 Problem detected. Operation may not run properly. Cancel operation? Yes No Detail	***Yes*** : Stops processing of the started application that may cause troubles. ***No*** : Continues processing of the started application. ***Detail*** : Lists names of the detected problem elements.
Warning Level 2 Problem detected. Operation may not run properly. Canceling operation. OK Detail	***OK*** : Stops processing of the started application that may cause troubles. ***Detail*** : Lists names of the detected problem elements.
Warning Level 3 Problem detected. Operation may not run properly. Delete data? Yes No Detail	***Yes*** : Deletes data that may cause troubles. ***No*** : Stops processing of the started application that may cause troubles. ***Detail*** : Lists names of the detected problem elements.
Warning Level 4 Problem detected. Deleting data. OK Detail	***OK*** : Deletes data that may cause troubles. ***Detail*** : Lists names of the detected problem elements.

INFORMATION

- In case some problem is detected through scan in the i-αppli set as the i-αppli standby display and activating i-αppli is stopped, the i-αppli standby display is canceled.

Checking the pattern definition version

Scan Version

1 Press Menu 8 3 7 4

Main specification

Item	FOMA D902iS
Size (mm)	110 (H) x 49 (W) x 19.9 (D) (when closed)
Weight (g)	Approx. 124 (with battery pack)
Continuous standby time	While standing still: Approx. 550 hours While moving: Approx. 380 hours
Continuous call time	During a voice call: Approx. 170 minutes During a videophone call: Approx. 90 minutes
Type of battery pack	Lithium ion battery
Capacity of battery	790 mAh
Charging time	Approx. 120 minutes
Camera pixels	Out-camera: Effective pixels: 2M (Max record pixels: 4M) In-camera: Effective pixels: 0.10M (Max record pixels: 0.10M)
Digital zoom	Out-camera : up to 28 times In-camera : up to twice

- Continuous call time is an estimate of call time of FOMA terminal when it can send or receive signals normally.
- Continuous standby time is an estimate of operation time of FOMA terminal when it is closed and able to receive signals normally. The call/standby time may be reduced to about half, depending on the amount of charge in the battery, the function settings, the ambient temperature and signal conditions (radio waves do not or hardly reach). Using i-mode communication reduces the call (communication)/standby time. Even if you do not make a call or use i-mode, the call

(communication)/standby time will be reduced by composing i-mode Mail, or starting downloaded i-αppli software or the i-αppli standby display.
- Continuous standby time (while standing still) is the average operation time of FOMA terminal when it is standing still, closed and able to receive signals normally.
- Continuous standby time (while moving) is the average operation time of FOMA terminal that is standing still, moving and outside the service area when it is closed and able to receive signals normally.
- Alternatively, if you perform data communication or Multiaccess, use Camera or play video/i-motion (including music data), the call (communication)/standby time will be reduced.
- The battery pack can be charged regardless of whether FOMA terminal is turned on or off. However, charging takes longer with the power turned on.

SAR certification information

This model phone FOMA D902iS meets the MIC's*1 technical regulation for exposure to radio waves. The technical regulation established permitted levels of radio frequency energy, based on standards that were developed by independent scientific organizations through periodic and through evaluation of scientific studies. The regulation employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit is 2 watts/kilogram (W/kg)*2 averaged over ten grams of tissue. The limit includes a substantial safety margin designed to assure the safety of all persons, regardless of age and health. The value of the limit is equal to the international guidelines recommended by ICNIRP*3.
All phone models should be confirmed to comply with the regulation, before they are available for sale to the public. The highest SAR value for this model phone is 0.966 W/kg. It was taken by the Telecom Engineering Center (TELEC) and the test for SAR was conducted in accordance with the MIC testing procedure using standard operating positions with the phone transmitting at its highest permitted power level in all tested frequency bands. While there may be differences between the SAR levels of various phones and at various positions, they all meet the MIC's technical regulation. Although the SAR is determined at the highest certified power level, the actual SAR of the phone during operation can be well below the maximum value.
For further information about SAR, please see the following websites:

World Health Organization (WHO):
http://www.who.int/peh-emf/
ICNIRP: http://www.icnirp.de/
MIC: http://www.soumu.go.jp/english/index.html
TELEC: http://www.telec.or.jp/ENG/index_e.html
NTT DoCoMo: http://www.nttdocomo.co.jp/product/ (Japanese only)
MITSUBISHI ELECTRIC:
http://www.MitsubishiElectric.co.jp/d902is/

*1 Ministry of Internal Affairs and Communications
*2 The technical regulation is provided in Article 14-2 of the Ministry Ordinance Regulating Radio Equipment.
*3 International Commission on Non-Ionizing Radiation Protection

MEMO

MEMO

MEMO

MEMO